

100 Gb/s 10km QSFP28 LR4 Transceiver

QSFP Series

- **Support line rates from 103.125 Gbps**
- **Transmission data rate up to 25.78 (NRZ) per channel**
- **Up to 10km transmission on single mode fiber**
- **Support Commercial and Industrial Temperature**
- **Low Power Dissipation**



Ascent's 100G QSFP28 LR4 is designed for 10km optical communication applications. This module contains 4-lane optical transmitter, 4-lane optical receiver and module management block including 2 wire serial inter-face. The optical signals are multiplexed to a single-mode fiber through an industry standard LC connector.

Ascent's 100G QSFP28 LR4 Optical Transceiver integrates receiver and transmitter path on one module. In the transmit side, four lanes of serial data streams are recovered, retimed, and passed to four laser drivers. The laser drivers control 4 × Distributed Feedback Laser (DFB) with center wavelengths of 1296 nm, 1300 nm, 1305 nm, and 1309 nm. The optical signals are multiplexed to a single-mode fiber through an industry standard LC connector. In the receive side, the four lanes of optical data streams are optically de-multiplexed by the integrated optical de-multiplexer. Each data stream is recovered by a PIN photo-detector and trans-impedance amplifier, retimed. This module features a hot-pluggable electrical interface, low power consumption and MDIO management interface.

This product is designed with form factor, optical/electrical connections, and digital diagnostic interface according to the QSFP28 Multi-Source Agreement (MSA) and compliant to IEEE 802.3bm.

Key Features

- Support line rates from 103.125 Gbps
- Transmission data rate up to 25.78 (NRZ) per channel
- Up to 10km transmission on single mode fiber
- LAN WDM DML laser and PIN ROSA
- High speed I/O electrical interface (CAUI-4)
- I2C interface with integrated Digital Diagnostic monitoring
- QSFP28 MSA package with duplex LC connector
- Single +3.3V power supply dissipation

Commercial: < 4W

Industrial: < 5W


- Temperature Range:

Commercial: 0°C to +70°C

Industrial: -40°C to +85°C

- Complies with EU Directive 2015/863/EU


Outline Dimension

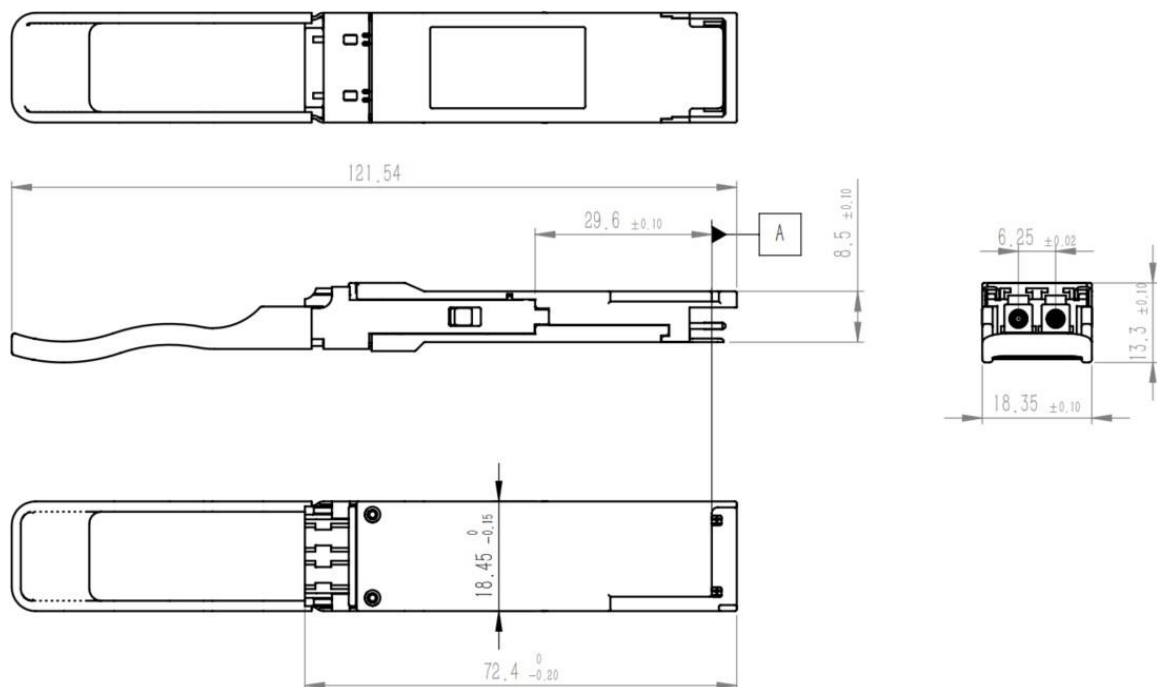


EEPROM Information

EEPROM memory map specific data field description is as below:

2-wire serial address, 1010000x (A0h)*

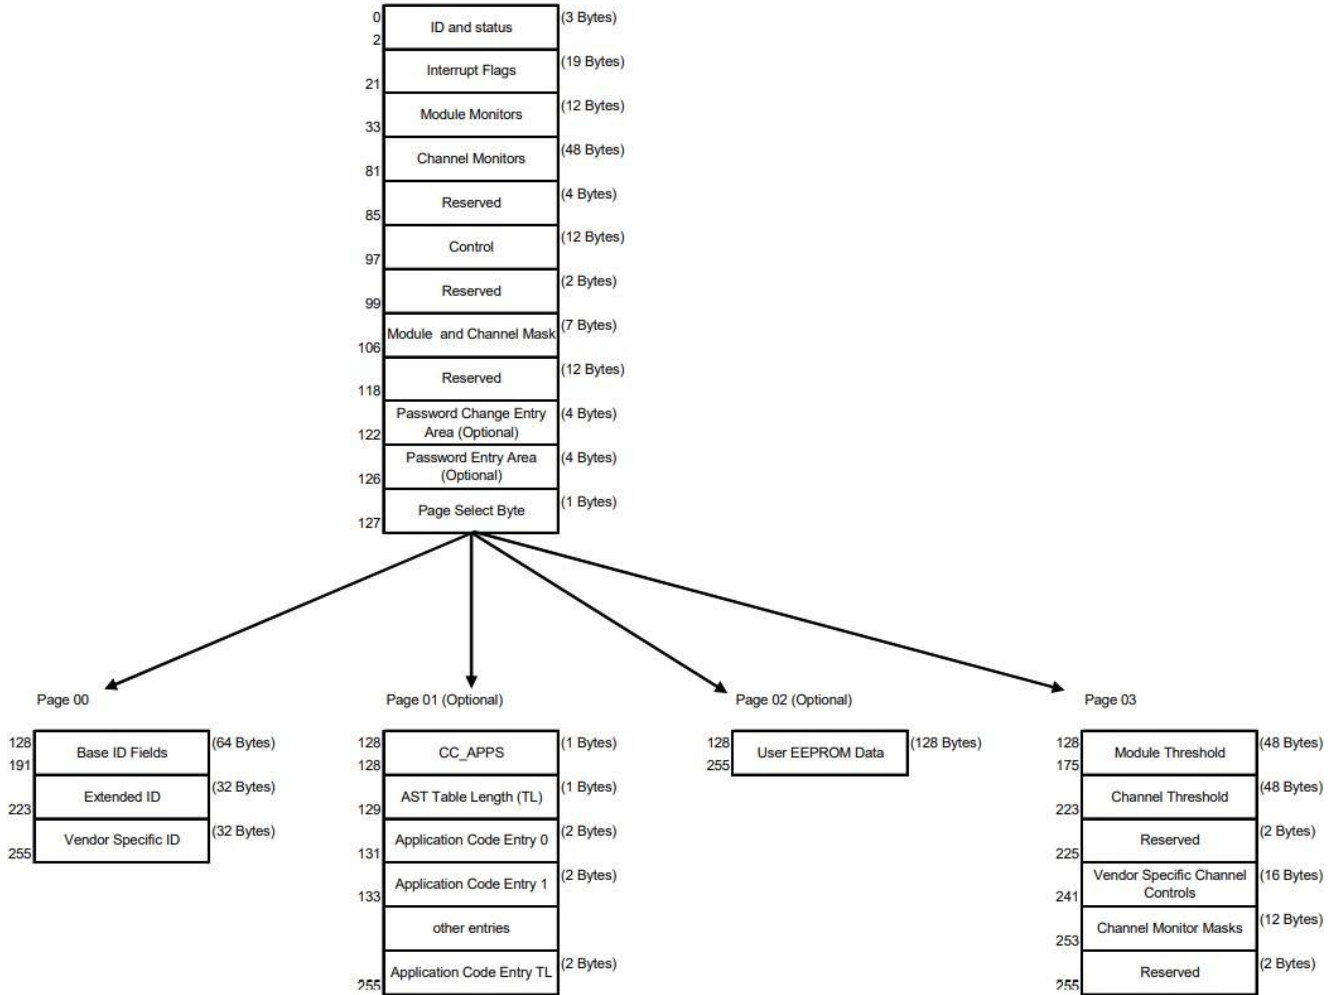

Pin Assignment

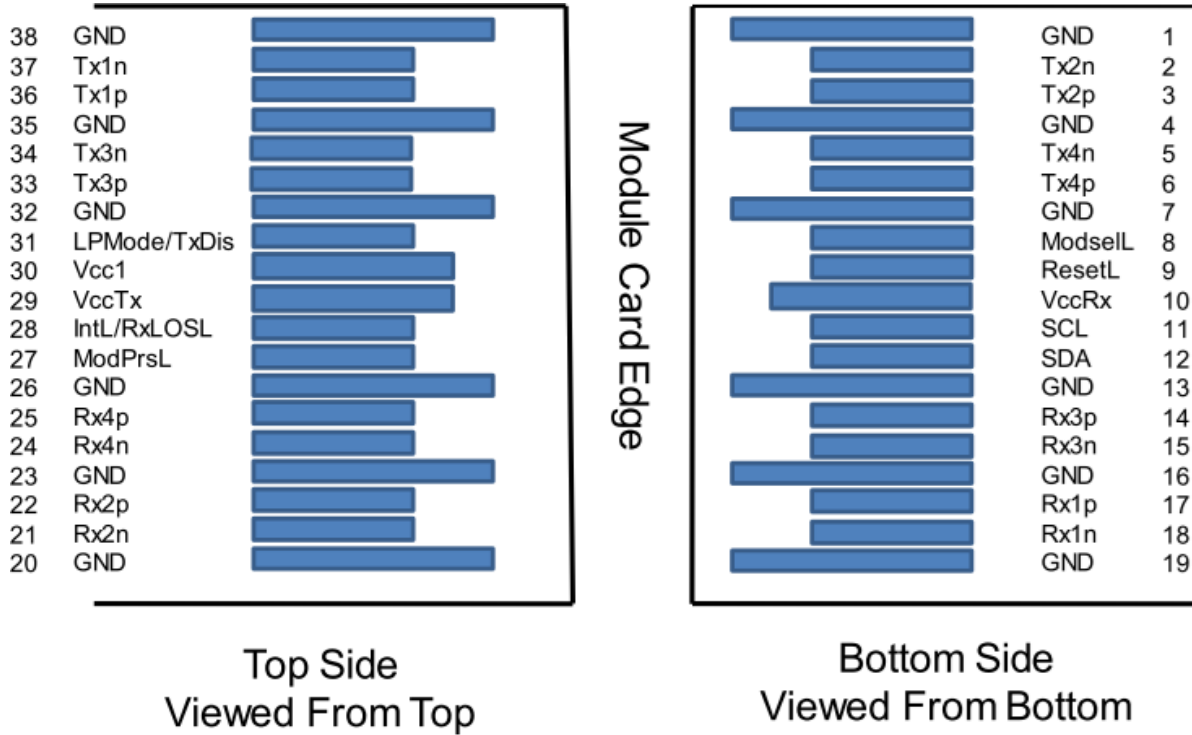

PIN	Logic	Symbol	Description	Plug Seq.	Notes
1		GND	Ground	1	1
2	CML-I	Tx2n	Transmitter Inverted Data Input	3	
3	CML-I	Tx2p	Transmitter Non-Inverted Data output	3	
4		GND	Ground	1	1
5	CML-I	Tx4n	Transmitter Inverted Data Input	3	
6	CML-I	Tx4p	Transmitter Non-Inverted Data output	3	
7		GND	Ground	1	1
8	LVTLL-I	ModSelL	Module Select	3	
9	LVTLL-I	ResetL	Module Reset	3	
10		VccRx	+ 3.3V Power Supply Receiver	2	2
11	LVC MOS-I/O	SCL	2-Wire Serial Interface Clock	3	
12	LVC MOS-I/O	SDA	2-Wire Serial Interface Data	3	
13		GND	Ground	1	
14	CML-O	Rx3p	Receiver Non-Inverted Data Output	3	
15	CML-O	Rx3n	Receiver Inverted Data Output	3	
16		GND	Ground	1	1
17	CML-O	Rx1p	Receiver Non-Inverted Data Output	3	
18	CML-O	Rx1n	Receiver Inverted Data Output	3	
19		GND	Ground	1	1
20		GND	Ground	1	1
21	CML-O	Rx2n	Receiver Inverted Data Output	3	
22	CML-O	Rx2p	Receiver Non-Inverted Data Output	3	
23		GND	Ground	1	1
24	CML-O	Rx4n	Receiver Inverted Data Output	3	1
25	CML-O	Rx4p	Receiver Non-Inverted Data Output	3	
26		GND	Ground	1	1

27	LVTTL-O	ModPrsL	Module Present	3	
28	LVTTL-O	IntL/Rx_LOS	Interrupt/Rx_LOS	3	
29		VccTx	+3.3 V Power Supply transmitter	2	2
30		Vcc1	+3.3 V Power Supply	2	2
31	LVTTL-I	LPMoDe/TxDI S	Low Power Mode/Tx_Disable	3	
32		GND	Ground	1	1
33	CML-I	Tx3p	Transmitter Non-Inverted Data Input	3	
34	CML-I	Tx3n	Transmitter Inverted Data Output	3	
35		GND	Ground	1	1
36	CML-I	Tx1p	Transmitter Non-Inverted Data Input	3	
37	CML-I	Tx1n	Transmitter Inverted Data Output	3	
38		GND	Ground	1	1

Notes:

1. GND is the symbol for signal and supply (power) common for QSFP28 modules. All are common within the QSFP28 module and all module voltages are referenced to this potential unless otherwise noted. Connect these directly to the host board signal common ground plane.
2. Vcc Rx, Vcc1 and Vcc Tx are the receiving and transmission power suppliers and shall be applied concurrently. Recommended host board power supply filtering is shown below. Vcc Rx, Vcc1 and Vcc Tx may be internally connected within the QSFP28 transceiver module in any combination. The connector pins are each rated for a maximum current of 500mA.

Digital Diagnostic Functions

Parameter	Range	Unit	Accuracy	Calibration
Temperature	-40 to +85	°C	±3°C	Internal / External
Voltage	3.0 to 3.6	V	±3%	Internal / External
Bias Current	30 to 100	mA	±10%	Internal / External
TX Power	-4.3 to 4.5	dBm	±3dB	Internal / External
RX Power	-10.6 to 4.5	dBm	±3dB	Internal / External

Note:

The transceivers provide serial ID memory contents and diagnostic information about the present operating conditions by the 2-wire serial interface (SCL, SDA). The diagnostic information with internal calibration or external calibration all are implemented, including received power monitoring, transmitted power monitoring, bias current monitoring, supply voltage monitoring and temperature monitoring.

Specifications

Absolute Maximum Ratings

Parameter	Symbol	Min.	Max.	Unit
Storage Temperature	T _s	-40	85	°C
Maximum Supply Voltage	V _{CC}	-0.5	3.6	V
Operating Relative Humidity	RH		85	%

Recommended Operating Conditions

Parameter	Symbol	Min.	Typ.	Max.	Unit	Note
Operating Case Temperature	Top	0		+70	°C	QSFP28-100G-LP10
		-40		+85	°C	QS28-100G-LP10A
Power Supply Voltage	V _{CC}	3.13	3.3	3.47	V	
Power Supply Current	I _{CC}	-		1.21	A	QSFP28-100G-LP10
				1.51	A	QS28-100G-LP10A
Maximum Power Dissipation	P _D			4	W	QSFP28-100G-LP10
				5		QS28-100G-LP10A
Aggregate Bit Rate	BR _{AVE}		103.125		Gb/s	
Lane Bit Rate	BR _{LANE}		25.78125		Gbps	
Transmission Distance	TD			10	km	
Coupled Fiber	Single-mode fiber					9/125 μm SMF

Optical Characteristics

Parameter	Symbol	Min	Typ	Max	Unit	Note
Transmitter						
Signaling Speed per Lane			25.78125		Gbps	
Wavelength Assignment						
Lane Wavelength	L0	1294.53	1295.56	1296.59	nm	
	L1	1299.02	1300.05	1301.09	nm	
	L2	1303.54	1304.58	1305.63	nm	
	L3	1308.09	1309.14	1310.19	nm	
Total Average Launch Power	P _T			10.5	dBm	1
Average Launch Power per Lane, OMA, Each Lane	P _{avg}	-4.3		4.5	dBm	1
Difference in Launch Power between any Two Lanes(Average and OMA) between any Two Lanes (OMA)	P _{tx, diff}			3	dB	
Average Output Power (Laser Turn off)	P _{off}			-30	dBm	
Side Mode Suppression Ratio	SMSR	30			dB	
Extinction Ratio	ER	4			dB	

Parameter	Symbol	Min	Typ	Max	Unit	Note
RIN20OMA	RIN			-130	dB/Hz	
Optical Return Loss Tolerance	TOL			20	dB	
Transmitter Reflectance	R _T			-12	dB	
Optical Eye Mask	{0.25,0.4, 0.45, 0.25, 0.28, 0.4}				%	2
Receiver						
Signaling Rate, Each Lane	25.78125				Gbps	
Center Wavelength Lane 0	λ ₀	1294.53	1295.56	1296.59	nm	
Center Wavelength Lane 1	λ ₁	1299.02	1300.05	1301.09	nm	
Center Wavelength Lane 2	λ ₂	1303.54	1304.58	1305.63	nm	
Center Wavelength Lane 3	λ ₃	1308.09	1309.14	1310.19	nm	
Damage Threshold , Each Lane	P _{damage}	5.5			dBm	
Average Receive Power, Each Lane		-10.6		4.5	dBm	
Receiver Sensitivity (OMA) per Lane	SEN			-8.6	dBm	3
Los Assert	LosA	-30			dBm	
Los De-assert	LosDA			-12	dBm	
Los Hysteresis	LosH	0.5			dB	

Notes:

1. The optical power is launched into SMF.
2. Measured with a PRBS 231-1 test pattern @25.78125, Hit ratio≤5E⁻⁵.
3. Measured with a PRBS 231-1 test pattern @25.78125 Gb/s, BER≤1E⁻¹².

Electrical Characteristics

Parameter	Symbol	Min	Typ	Max	Unit	Note
Transmitter (Module Input)						
Data Rate, Each Lane			25.78125		Gbps	
Differential Voltage pk-pk	V _{pp}			900	mV	1
Common Mode Voltage	V _{cm}	-350		2850	mV	
Transition Time	Trise/Tf all	10			ps	2
Receiver (Module Output)						
Data Rate, Each Lane			25.78125		Gbps	
Common Mode Noise, RMS	V _{rms}			17.5	mV	
Differential Output Voltage	V _{out, pp}			900	mV	
Wwing						
Eye Width	EW15	0.57			UI	
Eye Height	EH15	228			mV	
Differential Termination Resistance Mismatch				10	%	1
Transition Time	Trise/Tf all	12			ps	

Notes:

1. At 1 MHz
2. 20% to 80%

Ordering Information

Product Name	Product Description
QSFP28-100G-LP10	QSFP28 plug-in, 100GBASE-LR4 1295 nm, 1300 nm, 1304 nm, 1309 nm, 10 km optical transceiver, LC, DOM
QSFP28-100G-L10A	QSFP28 Plug-in, 100GBASE-LR4 1295, 1300, 1304, 1309nm 10 km Optical Transceiver, LC, DOM, -40 to 85 °C
JQ28-100G-LP10	QSFP28 plug-in, 100GBASE-LR4 1295 nm, 1300 nm, 1304 nm, 1309 nm, 10 km optical transceiver, LC, DOM, Compatible with Juniper
JQ28-100G-LP10A	QSFP28 Plug-in, 100GBASE-LR4 1295, 1300, 1304, 1309nm 10km Optical Transceiver, LC, DOM, Industrial Temp -40 °C to +85 °C, Compatible with Juniper

Contact Information



Ascent Communication Technology Ltd

AUSTRALIA

140 William Street, Melbourne
Victoria 3000, AUSTRALIA
Phone: +61-3-8691 2902

CHINA

Unit 1933, 600 Luban Road
200023, Shanghai, CHINA
Phone: +86-21-60232616

EUROPE

Pfarrer-Bensheimer-Strasse 7a
55129 Mainz, GERMANY
Phone: +49 (0) 6136 926 3246

Hong Kong SAR

Unit 9, 12th Floor, Wing Tuck Commercial Centre
177 Wing Lok Street, Sheung Wan, Hong Kong SAR
Phone: +852-2851 4722

USA

2710 Thomes Ave
Cheyenne, WY 82001, USA
Phone: +1 203 350 9822

VIETNAM

11th Floor, Hoa Binh Office Tower
106 Hoang Quoc Viet Street, Nghia Do Ward
Cau Giay District, Hanoi 10649, VIETNAM
Phone: +84-24-37955917

WEB: www.ascentcomtec.com

EMAIL: sales@ascentcomtec.com

Specifications and product availability are subject to change without notice.
Copyright © 2024 Ascent Communication Technology Limited. All rights reserved.
Ver. ACT_QSFP28-100G-LP10_Datasheet_V1d_Nov_2017