

## 10 Gb/s 1550 nm SFP+ 80 km Transceiver SFPP Series



- **Up to 11.1 Gbps Data Links**
- **Up to 80 km transmission on SMF**
- **EML transmitter and PIN receiver**
- **Metal enclosure, for lower EMI**
- **Hot-pluggable SFP+ footprint**
- **Specifications compliant with SFF-8472, SFF-8431**
- **Single 3.3V power supply**
- **Power consumption < 1.5 W**

ASCENT's SFP+ transceiver SFPP-ATLP-51-80 is designed for use in 10-Gigabit Ethernet links up to 80 km over single mode fiber.

The module consists of 1550 EML Laser, InGaAs PIN and preamplifier in a high-integrated optical sub-assembly.

Digital diagnostics functions are available via a 2-wire serial interface, as specified in SFF-8472. The module data link up to 80 km in 9/125  $\mu\text{m}$  single-mode fiber.


The SFP+ transceivers provide a unique enhanced digital diagnostic monitoring interface, which allows real-time access to device operating parameters such as transceiver temperature, laser bias current, transmitted optical power, received optical power, and transceiver supply voltage.

It also defines a sophisticated system of alarm and warning flags, which alerts end-users when particular operating parameters are outside of a factory set normal range.


## Key Features

- Up to 11.1 Gbps Data Links
- Up to 80 km transmission on SMF
- EML transmitter and PIN receiver
- Metal enclosure, for lower EMI
- 2-wire interface with integrated Digital Diagnostic monitoring
- Hot-pluggable SFP+ footprint
- Compliant with SFP+ MSA with LC connector, SFF-8472, SFF-8431
- Single 3.3V power supply
- Case operating temperature range: 0 °C to 70 °C
- Power consumption < 1.5 W
- 10BASE-ZR/ZW
- RoHS compliant

## Outline Diagram

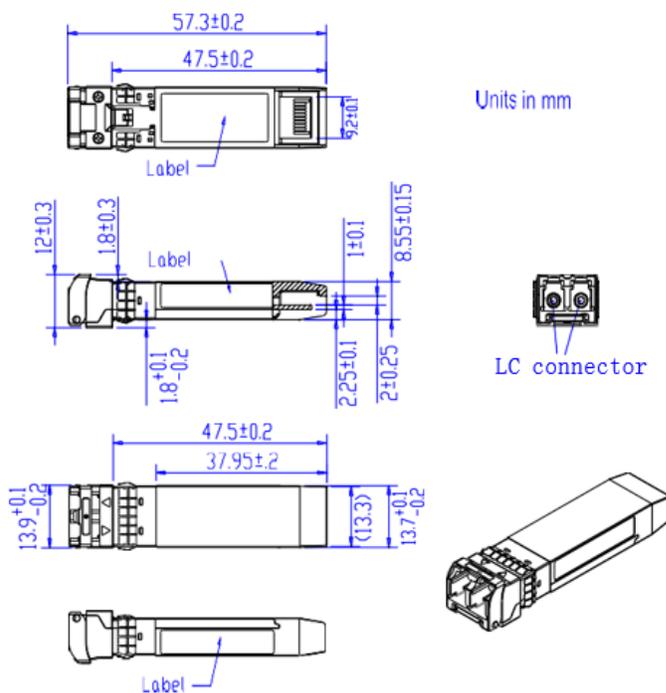

## Recommend Circuit Schematic

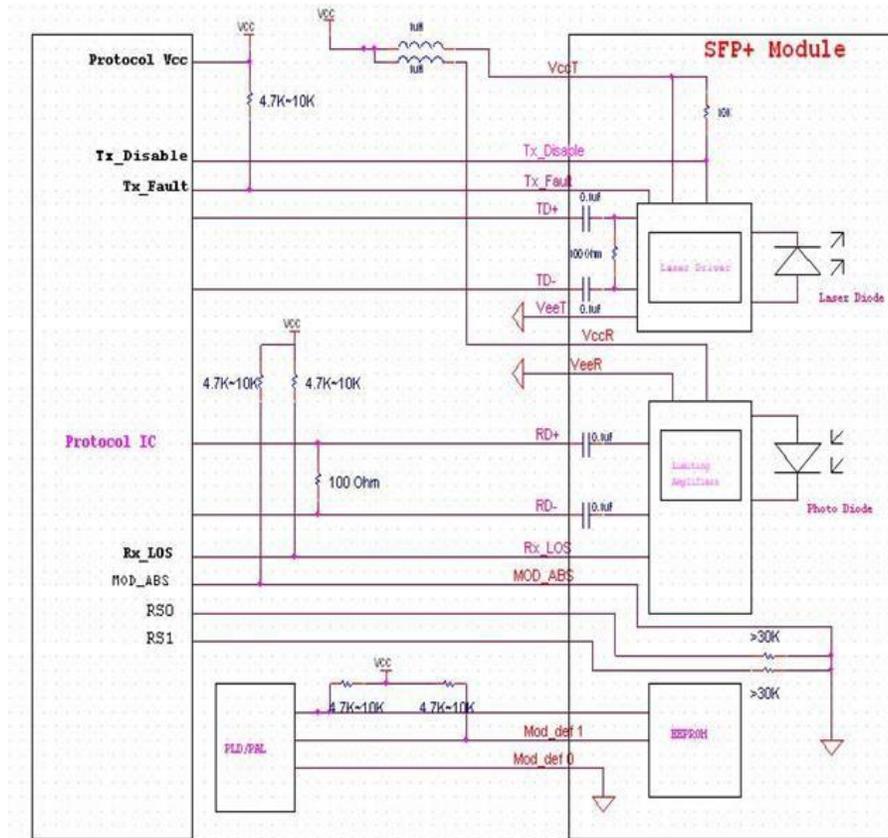

## Regulatory Compliance

Feature	Reference	Performance
Electrostatic Discharge (ESD)	IEC/EN 61000-4-2	Compatible with standards
Electromagnetic Interference(EMI)	FCC Part 15 Class B EN 55022 Class B(CISPR 22A)	Compatible with standards
Laser Eye Safety	FDA 21CFR 1040.10, 1040.11 IEC/EN 60825-1, 2	Class 1 laser product
Component Recognition	EC/EN 60950,	
UL	Compatible with standards	
ROHS	2002/95/EC	
EMC	Compatible with standards	
3	EN61000-	
	Compatible with standards	

## Digital Diagnostic Functions

Ascent's SFPP-ATLP-51-80 transceivers support the 2-wire serial communication protocol as defined in the SFP+MSA.


The standard SFP serial ID provides access to identification information that describes the transceiver's capabilities, standard interfaces, manufacturer, and other information.

Additionally, ASCENT SFP+ transceivers provide a unique enhanced digital diagnostic monitoring interface, which allows real-time access to device operating parameters such as transceiver temperature, laser bias current, transmitted optical power, received optical power, and transceiver supply voltage. It also defines a sophisticated system of alarm and warning flags, which alerts end-users when particular operating parameters are outside of a factory set normal range.

The SFP MSA defines a 256-byte memory map in EEPROM that is accessible over a 2-wire serial interface at the 8 bit address 1010000X (A0h). The digital diagnostic monitoring interface makes use of the 8 bit address 1010001X (A2h), so the originally defined serial ID memory map remains unchanged.

The operating and diagnostics information is monitored and reported by a Digital Diagnostics Transceiver Controller (DDTC) inside the transceiver, which is accessed through a 2-wire serial interface. When the serial protocol is activated, the serial clock signal (SCL, Mod Def 1) is generated by the host. The positive edge clocks data into the SFP transceiver into those segments of the E2PROM that are not write-protected. The negative edge clocks data from the SFP transceiver. The serial data signal (SDA, Mod Def 2) is bi-directional for serial data transfer. The host uses SDA in conjunction with SCL to mark the start and end of serial protocol activation. The memories are organized as a series of 8-bit data words that can be addressed individually or sequentially.

## Pin Assignment

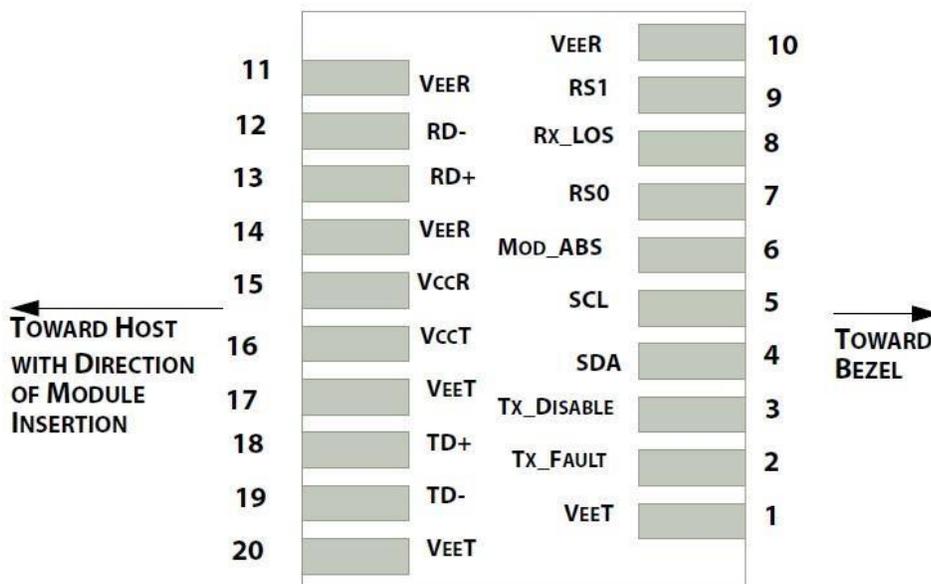

Pin	Name	Function	Notes
1	VeeT	Transmitter Ground (Common with Receiver Ground)	1
2	Tx Fault	Transmitter Fault.	2
3	Tx Disable	Transmitter Disable. Laser output disabled on high or open.	3
4	SDA	2-wire Serial Interface Data Line	4
5	SCL	2-wire Serial Interface Clock Line	4
6	MOD_ABS	Module Absent. Grounded within the module	4

Pin	Name	Function	Notes
7	RS0	Rate Select 0 Loss of Signal indication. Logic 0 indicates normal operation. No connection required	5
8	LOS	Receiver Ground (Common with Transmitter Ground)	6
9	RS1	Receiver Ground (Common with Transmitter Ground) Receiver Inverted DATA out. AC Coupled	1
10	VeeR	Receiver Non-inverted DATA out. AC Coupled	1
11	VeeR	Receiver Ground (Common with Transmitter Ground)	1
12	RD-	Receiver Power Supply	
13	RD+	Transmitter Power Supply	
14	VeeR	Transmitter Ground (Common with Receiver Ground)	1
15	VccR	Transmitter Non-Inverted DATA in. AC Coupled.	
16	VccT	Transmitter Inverted DATA in. AC Coupled.	
17	VeeT	Transmitter Ground (Common with Receiver Ground)	1
18	TD+	Transmitter Ground (Common with Receiver Ground)	
19	TD-	Transmitter Fault.	
20	VeeT	Transmitter Disable. Laser output disabled on high or open.	1

**Note:**

1. Circuit ground is internally isolated from chassis ground.
2. Tx FAULT is an open collector/drain output, which should be pulled up with a 4.7 kΩ to 10 kΩ resistor on the host board if intended for use. Pull up voltage should be between 2.0V to Vcc + 0.3V. A high output indicates a transmitter fault caused by either the TX bias current or the TX output power exceeding the preset alarm thresholds. A low output indicates normal operation. In the low state, the output is pulled to <0.8V.
3. Laser output disabled on Tx DIS >2.0V or open, enabled on Tx DIS <0.8V.
4. Should be pulled up with 4.7kΩ to 10kΩ host board to a voltage between 2.0V and 3.6V. MOD\_ABS pulls line low to indicate module is plugged in.
5. Internally pulled down per SFF-8431 Rev 4.1.
6. LOS is open collector output. It should be pulled up with 4.7kΩ to 10kΩ on host board to a voltage Between 2.0V and 3.6V. Logic 0 indicates normal operation; logic 1 indicates loss of signal.

## Specifications

### Absolute Maximum Ratings

Parameter	Symbol	Min.	Typ.	Max.	Unit	Note
Storage Temperature	T <sub>s</sub>	-40	-	85	°C	
Relative Humidity	RH	5	-	95	%	
Power Supply Voltage	V <sub>CC</sub>	-0.3	-	4	V	
Signal Input Voltage		V <sub>CC</sub> -0.3	-	V <sub>CC</sub> +0.3	V	

### Recommended Operating Conditions

Parameter	Symbol	Min.	Typ.	Max.	Unit	Note
Operating Case Temperature	T <sub>case</sub>	0	-	70	°C	Commercial
		-40	-	+85	°C	Industrial
Power Supply Voltage	V <sub>CC</sub>	3.14	3.3	3.47	V	
Power Supply Current	I <sub>CC</sub>	-		450	mA	
Data Rate	BR		10.3125		Gbps	
Transmission Distance	TD		-	80	km	
Coupled fiber	Single-mode fiber					9/125 μm SMF

### Optical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Note
<b>Transmitter</b>						
Average Launched Power	PO	-1		+4	dBm	1
Extinction Ratio	ER	8.2			dB	
Center Wavelength	λ <sub>c</sub>	1530	1550	1565	nm	
Spectrum Band Width (RMS)	σ			1.0	nm	
SMSR		30			dB	
Transmitter OFF Output Power	POff			-30	dBm	
Transmitter and Dispersion Penalty	TDP			3.0	dB	
Output Eye Mask	Compliant with IEEE 802.3a					
<b>Receiver</b>						
Input Optical Wavelength	λ		1270	1610	nm	
Receiver Sensitivity	P <sub>sen</sub>			-23	dBm	2
Input Saturation Power (Overload)	P <sub>sat</sub>		-6		dBm	
Receiver Reflectance	R <sub>rx</sub>			-27	dB	
LOS Assert	LOSA		-35		dBm	
LOS De-Assert	LOSD			-26	dBm	
LOS Detect Hysteresis	PHYS		0.5		dB	

### Note:

1. Launched power (avg.) is power coupled into a single-mode fiber with master connector. (Before of Life)
2. Measured with conformance test signal for BER = 10<sup>-12</sup> @ 10.3125 Gbps, PRBS=2<sup>31</sup>-1, NRZ.

## Electrical Characteristics

Parameter	Symbol	Min	Typ	Max	Unit	Note
Supply Voltage	Vcc	3.14	3.3	3.46	V	
Supply Current	Icc			450	mA	Commercial
<b>Transmitter</b>				550	mA	Industrial
Input Differential Impedance	Rin		100		Ω	1
Single Ended Data Input Swing	Vin, pp	180		700	mV	
Transmit Disable Voltage	VD	Vcc-1.3		Vcc Vee+ 0.8	V	
Transmit Enable Voltage	VEN	Vee			V	2
Transmit Disable Assert Time				10	μs	
<b>Receiver</b>						
Differential Data Output Swing	Vout, pp	300		850	mV	3
Data Output Rise Time	tr	28			ps	4
Data Output Fall Time	tf	28			ps	4
LOS Fault	VLOS fault	Vcc-1.3		VccHOST	V	5
LOS Normal	VLOS norm	Vee		Vee+0.8	V	5
Power Supply Rejection	PSR	100			mVpp	6

### Notes:

1. Connected directly to TX data input pins. AC coupled thereafter.
2. Or open circuit.
3. Into 100 Ω differential termination.
4. 20 % to 80 %.
5. Loss Of Signal is LVTTTL. Logic 0 indicates normal operation; logic 1 indicates no signal detected.
6. Receiver sensitivity is compliant with power supply sinusoidal modulation of 20 Hz to 1.5 MHz up to specified value applied through the recommended power supply filtering network.

## Ordering Information

Product name	Product description
SFPP-ATLP-51-80	SFP+ plug-in, 10 Gbps, 80 km, TX = 1550/RX wide, on two single-mode fibers, LC/PC blue
SFPP-ATLP-51-80A	SFP+ plug-in, 10 Gbps, 80 km, TX = 1550/RX wide, on two single-mode fibers, LC/PC blue, -40 °C to +85 °C industrial
JSPP-ATLP-51-80	SFP+ plug-in, 10 Gbps, 80 km, TX = 1550/RX wide, on two single-mode fibers, LC/PC blue Compatible with Juniper
JSPP-ATLP-51-80A	SFP+ plug-in, 10 Gbps, 80 km, TX = 1550/RX wide, on two single-mode fibers, LC/PC blue, -40 °C to +85 °C industrial, Compatible with Juniper

## Contact Information

---



### Ascent Communication Technology Ltd

#### AUSTRALIA

140 William Street, Melbourne  
Victoria 3000, AUSTRALIA  
Phone: +61-3-8691 2902

#### Hong Kong SAR

Room 1210, 12th Floor, Wing Tuck Commercial Centre  
181 Wing Lok Street, Sheung Wan , Hong Kong SAR  
Phone: +852-2851 4722

#### CHINA

Unit 1933, 600 Luban Road  
200023, Shanghai, CHINA  
Phone: +86-21-60232616

#### USA

2710 Thomes Ave  
Cheyenne, WY 82001, USA  
Phone: +1 203 350 9822

#### EUROPE

Pfarrer-Bensheimer-Strasse 7a  
55129 Mainz, GERMANY  
Phone: +49 (0) 6136 926 3246

#### VIETNAM

11th Floor, Hoa Binh Office Tower  
106 Hoang Quoc Viet Street, Nghia Do Ward  
Cau Giay District, Hanoi 10649, VIETNAM  
Phone: +84-24-37955917

**WEB:** [www.ascentcomtec.com](http://www.ascentcomtec.com)

**EMAIL:** [sales@ascentcomtec.com](mailto:sales@ascentcomtec.com)

Specifications and product availability are subject to change without notice.

Copyright © 2026 Ascent Communication Technology Limited. All rights reserved.

Ver. ACT\_SFPP-ATLP-51-80\_Datasheet\_V2b\_Mar\_2018