

10 Gb/s 1310 nm SFP+ 10 km Transceiver

SFP+ Series

- Up to 11.32 Gbps Data Links
- Up to 10 km transmission on SMF
- DFB Laser and PIN/TIA receiver
- Hot-pluggable SFP+ footprint
- Support Commercial and Industrial Temperature
- Compliant with SFP-8431, SFP-8432, SFP-8472, IEEE802.3ae



ASCENT's SFPP-ATLP-31-10 Small Form Factor Pluggable (SFP) transceivers are compatible with the Small Form Factor Pluggable Multi-Sourcing Agreement (MSA).

The transceiver consists of five sections: the LD driver, the limiting amplifier, the digital diagnostic monitor, the 1310nm FP laser and the PIN photo-detector. The module data link up to 10 km using 9/125 μ m single-mode fiber.


The optical output can be disabled by a TTL logic high-level input of Tx Disable, and the system also can disable the module via I2C. Tx Fault is provided to indicate that degradation of the laser. Loss Of signal (LOS) output is provided to indicate the loss of an input optical signal of receiver or the link status with partner.

The system can also get the LOS (or Link)/Disable/Fault information via I2C register access. The metal housing ensures low EMI interference standards, with connector retainer.


Key Features

- Support data rate up to 11.32Gb/s
- Hot-Pluggable SFP Footprint and Dual LC Connector
- Up to 10km long range (LR) for G.652 SMF
- 1310nm DFB laser and PINreceiver
- ESD protect
- Low EMI metals
- Temperature Range:
Commercial: 0°C to +70°C
Industrial: -40°C to +85°C
- Compliant with SFP-8431
- Compliant with SFP-8432
- Compliant with SFP-8472
- Compliant with IEEE802.3ae, 10GBase-LR/LW

Outline Dimension

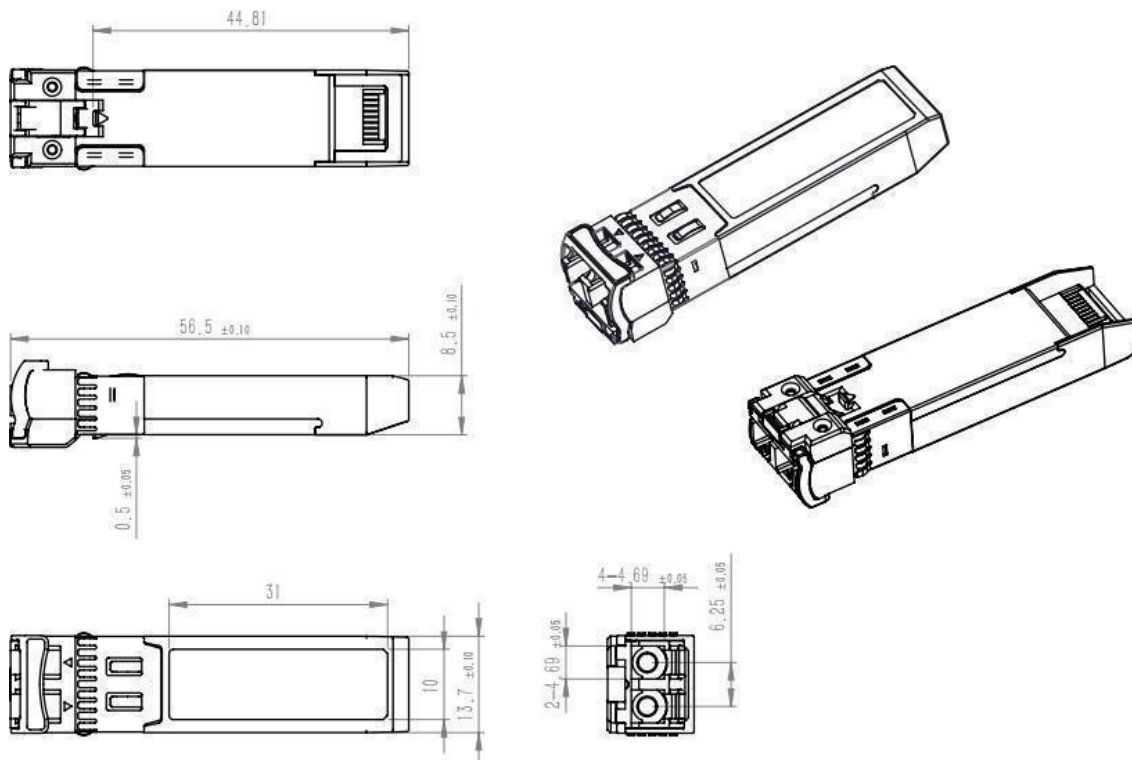

Transceiver Interface Block Diagram

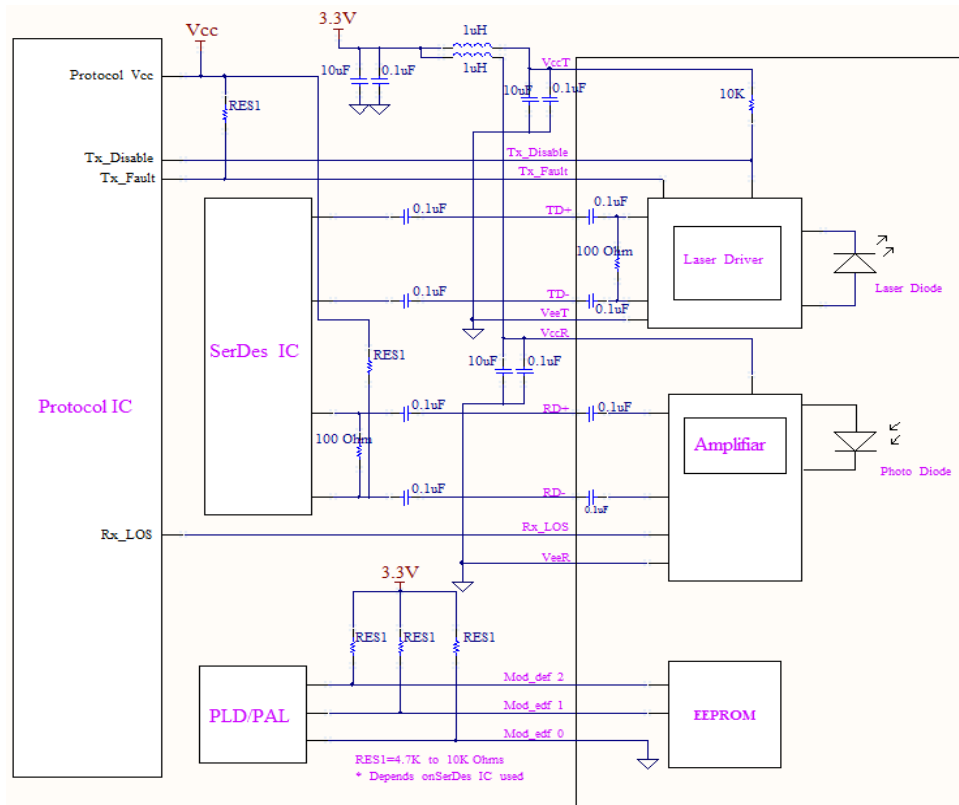

SFP Module EEPROM Information and Management

The SFP modules implement the 2-wire serial communication protocol as defined in the SFP -8472.

The serial ID information of the SFP modules and Digital Diagnostic Monitor parameters can be accessed through the I2C interface at address A0h and A2h.

The memory is mapped in below picture.


Detailed ID information (A0h) is listed in Table EEPROM Serial ID Memory Contents (A0h)

And the DDM specification at address A2h.

For more details of the memory map and byte definitions, please refer to the SFF-8472, "Digital Diagnostic Monitoring

Interface for Optical Transceivers". The DDM parameters have been internally calibrated.

Digital Diagnostic Memory Map (Specific Data Field Descriptions)

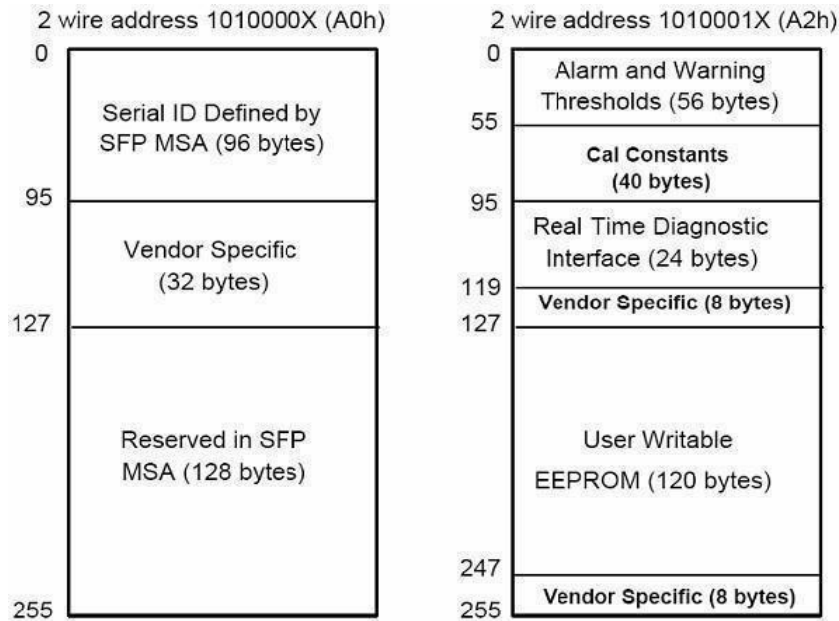

EEPROM Serial ID Memory Contents (A0h)

Data Address	Length (Byte)	Name of Length	Description and Contents
Base ID Fields			
0	1	Identifier	Type of Serial transceiver (03h=SFP)
1	1	Reserved	Extended identifier of type serial transceiver (04h)
2	1	Connector	Code of optical connector type (07=LC)
3-10	8	Transceiver	10G Base-LR
11	1	Encoding	64B/66B
12	1	BR, Nominal	Nominal baud rate, unit of 100Mbps
13-14	2	Reserved	(0000h)
15	1	Length(9um)	Link length supported for 9/125um fiber, units of 100m
16	1	Length(50um)	Link length supported for 50/125um fiber, units of 10m
17	1	Length(62.5um)	Link length supported for 62.5/125um fiber, units of 10m
18	1	Length(Copper)	Link length supported for copper, units of meters
19	1	Reserved	
20-35	16	Vendor Name	SFP vendor name: Ascent
36	1	Reserved	
37-39	3	Vendor OUI	SFP transceiver vendor OUI ID
40-55	16	Vendor PN	Part Number: "SFPP-ATLP-31-10" (ASCII)
56-59	4	Vendor rev	Revision level for part number
60-62	3	Reserved	
63	1	CCID	Least significant byte of sum of data in address 0-62
Extended ID Fields			
64-65	2	Option	Indicates which optical SFP signals are implemented (001Ah = LOS, TX_FAULT, TX_DISABLE all supported)
66	1	BR, max	Upper bit rate margin, units of %
67	1	BR, min	Lower bit rate margin, units of %
68-83	16	Vendor SN	Serial number (ASCII)

84-91	8	Date code	Manufacturing date code
92-94	3	Reserved	
95	1	CCEX	Check code for the extended ID Fields (addresses 64 to 94)
Vendor Specific ID Fields			
96-127	32	Readable	Specific date, read only
128-255	128	Reserved	Reserved for SFF-8079


Alarm and Warning Thresholds (A2h)

Data Address	Length (Byte)	Name of Length	Description and Contents
Base ID Fields			
00-01	2	Temp High Alarm	MSB at low address
02-03	2	Temp Low Alarm	MSB at low address
04-05	2	Temp High	MSB at low address
06-07	2	Warning Temp Low	MSB at low address
08-09	2	Warning Voltage High	MSB at low address
10-11	2	Alarm	MSB at low address
12-13	2	Voltage Low Alarm	MSB at low address
14-15	2	Voltage High	MSB at low address
16-17	2	Warning	MSB at low address
18-19	2	Bias High Alarm	MSB at low address
20-21	2	Bias Low Alarm	MSB at low address
22-23	2	Bias High Warning	MSB at low address
24-25	2	Bias Low Warning	MSB at low address
26-27	2	TX Power High	MSB at low address
28-29	2	Alarm	MSB at low address
30-31	2	TX Power Low	MSB at low address
32-33	2	Warning	MSB at low address
34-35	2	RX Power High	MSB at low address
36-37	2	Alarm	MSB at low address
38-39	2	RX Power Low	MSB at low address
40-41	2	Warning	MSB at low address
42-43	2	Optional Laser	MSB at low address
44-45	2	Temp High Alarm	MSB at low address
46-47	2	Optional Laser	MSB at low address
48-49	2	Temp Low Alarm	MSB at low address
50-51	2	Optional Laser Temp	MSB at low address
52-53	2	High	MSB at low address
		Warning	
		Optional Laser	MSB at low address
		Temp Low	MSB at low address
		Warning	
		Optional TEC	MSB at low address
		Current High Alarm	MSB at low address
		Optional TEC	MSB at low address
		Current Low Alarm	MSB at low address
		Optional TEC Current	MSB at low address

54-55	3	High Warning Optional TECCurrent Low Warning	MSB at low address
Calibration Constants for External Calibration Option			
56-91	36	Calibration Constants for External CalibrationOption	Refer to the SFP 8472 Rev12.4
92-94	3	Reserved	
95	1	Checksum	Byte 95 contains the low order 8 bits of the sumof bytes 0-94
Real Time Diagnostic and Control Registers			
96-110	15	A/D Values and Status Bits	Refer to the SFP 8472 Rev12.4
111	1	Reserved	Reserved (was assigned to SFF-8079).
Alarm and Warning Flag Bits			
112-117	6	Optional Alarm and Warning Flag	Refer to the SFP 8472 Rev12.4
Extended Module Control/Status Bytes			
118-119	2	Extended Module Control/Status Bytes	Refer to the SFP 8472 Rev12.4
Optional Page Select Byte			
120-126	7	Vendor Specific	Vendor specific memory addresses
127	1	Optional Page Select	Defines the page number for subsequent reads and writes to locations A2h
User Accessible EEPROM Locations			
128-247	120	User EEPROM	User writable EEPROM
Vendor Specific Control Function Locations			
248-255	8	Vendor Specific	Vendor specific control functions

Pin Assignment

Diagram of Host Board Connector Block Pin Numbers and Name

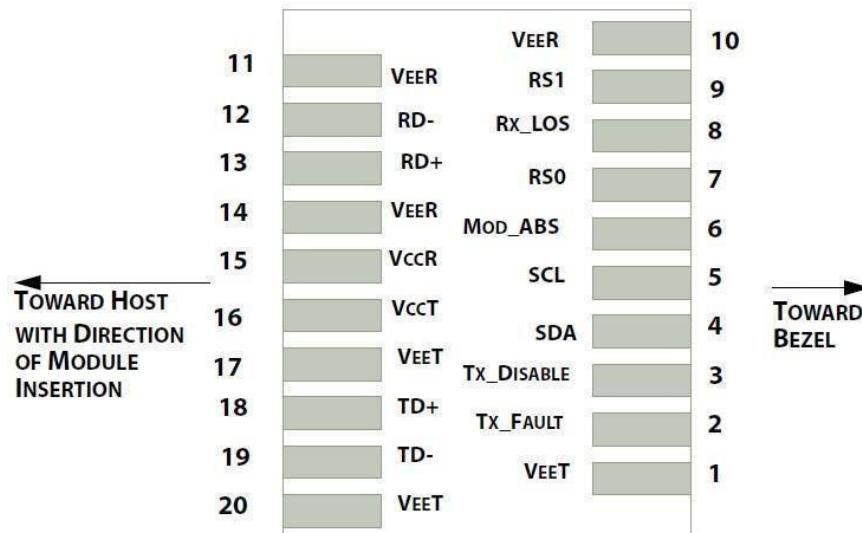

Pin	Name	Function	Notes
1	VeeT	Module transmitter ground	1
2	Tx Fault	Module transmitter fault	2
3	Tx Disable	Transmitter Disable; Turns off transmitter laser output	3
4	SDL	2 wire serial interface data input/output (SDA)	4
5	SCL	2 wire serial interface clock input (SCL)	4
6	MOD_ABS	Module Absent. Grounded within the module	4
7	RS0	Rate select0, optionally control SFP+ receiver. When high, input data rate >4.5Gb/s; when low, input data rate <=4.5Gb/s	5
8	LOS	Receiver Loss of Signal Indication	6
9	RS1	Rate select0, optionally control SFP+ transmitter. When high, input data rate >4.5Gb/s; when low, input data rate <=4.5Gb/s	1
10	VeeR	Module receiver ground	1
11	VeeR	Module receiver ground	1
12	RD-	Receiver inverted data out put	
13	RD+	Receiver non-inverted data out put	
14	VeeR	Module receiver ground	1
15	VccR	Module receiver 3.3V supply	
16	VccT	Module transmitter 3.3V supply	
17	VeeT	Module transmitter ground	1
18	TD+	Transmitter inverted data out put	
19	TD-	Transmitter non-inverted data out put	
20	VeeT	Module transmitter ground	1

Notes:

1. Circuit ground is internally isolated from chassis ground.
2. TFAULT is an open collector/drain output, which should be pulled up with a 4.7 kΩ to 10 kΩ resistor on the host board if intended for use. Pull up voltage should be between 2.0 V to Vcc + 0.3 V. A high output indicates a transmitter fault caused by either the TX bias current or the TX output power exceeding the preset alarm threshold. A low output indicates normal operation. In the low state, the output is pulled to <0.8 V.
3. Laser output disabled on TDIS > 2.0 V or open, enabled on TDIS < 0.8V.
4. Should be pulled up with 4.7 kΩ to 10 kΩ host board to a voltage between 2.0V and 3.6V. MOD_ABS pulls line low to indicate module is plugged in.
5. Internally pulled down per SFF-8431 Rev4.1.
6. LOS is open collector output. It should be pulled up with 4.7 kΩ to 10 kΩ on host board to a voltage between 2.0V and 3.6V. Logic 0 indicates normal operation; logic 1 indicates loss of signal.

Specifications

Absolute Maximum Ratings

Parameter	Symbol	Min.	Typ.	Max.	Unit	Note
Storage Temperature	T _s	-40		85	°C	
Maximum Supply Voltage	V _{CC}	-0.5		3.6	V	
Operating Relative Humidity	RH			95	%	

Recommended Operating Conditions

Parameter	Symbol	Min.	Typ.	Max.	Unit	Note
Case Operating Temperature	T _{OP}			70	°C	Commercial
		-40	-	85		Industrial
Power Supply Voltage	V _{CC}	3.1	3.3	3.5	V	
Data Rate	BR	1.25	10.3125		Gbps	
Transmission Distance	TD			10	km	
Coupled Fiber			Single-mode fiber			9/125 μm G.652

Electrical Characteristics (TOP = T_c, V_{CC} = 3.1 to 3.5 Volts)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Note
Supply Voltage	V _{CC}	3.1		3.5	V	
Supply Current (Commercial)	I _{CC}			300	mA	
Supply Current (Industrial)	I _{CC}			360	mA	
Power Consumption (Commercial)	P			1.0	W	
Power Consumption (Industrial)	P			1.2	W	
Transmitter Section						
CML Inputs(Differential)	V _{in, pp}	180		700	mV	
Input Impedance(Differential)	V _{DIS}	2		V _{CC}	V	
TX_DIS Disable		2		V _{CC} +0.3	V	
TX_DIS Enable		0		0.8	V	
TX_FAULT Fault		2		V _{CC} +0.3	V	
TX_FAULT Normal		0		0.5	V	
Receiver Section						
CML Outputs (Differential)	V _{out}	350		700	mVpp	1
Output Impedance (Differential)	Z _{out}	90	100	105	Ohm	
RX_LOS LOS		2		V _{CC} +0.3	V	2
RX_LOS Normal		0		0.8	V	2
MOD_DEF (0:2) VoH		2.5			V	With Serial ID
MOD_DEF (0:2) VoL		0		0.5	V	With Serial ID

Note:

1. CML logic, internally AC coupled.
2. Loss of Signal is LVTTTL. Logic 0 indicates normal operation; logic 1 indicates nosignaldetected.

Optical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Note
Data Rate	V _{cc}	1.25	10.3125	11.32	Gbps	
Transmitter						
Center Wavelength	λ_c	1260	1310	1355	nm	
Spectral Width (-20dB)	$\Delta\lambda$			1	nm	
Side Mode Suppression Ratio	SMSR	30			dB	
Average Output Power	P _{out}	-8.2		0.5	dBm	
Extinction Ratio	ER	3.5			dB	
Average Power of OFF Transmitter	P _{off}			-30	dBm	
Relative Intensity Noise	RIN			-128	dB/Hz	2
Receiver						
Wavelength Range	λ_C	1260		1620	nm	
Receiver Sensitivity	P _{min}			-14.4	dBm	3
Receiver Overload	P _{max}	0.5			dBm	
LOS De-Assert	LOSD			-16	dBm	
LOS Assert	LOSA	-30			dBm	
LOS-Hysteresis	Phys	0.5		5	dB	

Notes:

1. Output is coupled into a 9/125um SMF.
2. 12dB reflection.
3. Measured with worst ER, BER less than $1E^{-12}$ and PRBS $2^{31}-1$ at 10.3125 Gbps

Digital Diagnostic Functions

Parameter	Range	Unit	Accuracy	Calibration
Case Temperature	0 to +70	°C	±3°C	Internal / External
Industrial Temperature	-30 to +85	°C	±3°C	Internal / External
Voltage	3.0 to 3.6	V	±3%	Internal / External
Bias Current	10 to 100	mA	±10%	Internal / External
TX Power	-6 to +0	dBm	±3dB	Internal / External
RX Power	-15 to +0.5	dBm	±3dB	Internal / External

Note:

The transceivers provide serial ID memory contents and diagnostic information about the present operating conditions by the 2-wire serial interface (SCL, SDA). The diagnostic information with internal calibration or external calibration all are implemented, including received power monitoring, transmitted power monitoring, bias current monitoring, supply voltage monitoring and temperature monitoring.

Timing Characteristics

Parameter	Symbol	Min.	Typical	Max.	Unit
TX_Disable Assert Time	t_off			100	Us
TX_Disable Negate Time	t_on			2	ms
Time to Initialize Include Reset of TX_FAULT	t_int			300	ms
TX_FAULT from Fault to Assertion	t_fault			100	us
TX_Disable Time to Start Reset	t_reset	10			us
Receiver Loss of Signal Assert Time	T _A ,RX_LOS			100	us
Receiver Loss of Signal Deassert Time	T _d ,RX_LOS			100	us
Rate-Select Chage Time	t_ratesel			10	us
Serial ID Clock Time	t_serial-clock			100	kHz

Ordering Information

Product Name	Product Description
SFPP-ATLP-31-10	SFP+ plug-in, 10 Gbps, 10 km, TX=1310/RX wide, on two single-mode fibers, LC/PC Blue
SFPP-ATLP-31-10A	SFP+plug-in, 10 Gbps, 10 km, TX=1310/RX wide, on two single-mode fibers, LC/PC Blue, Industrial Temp -40 to 85°C
JSPP-ATLP-31-10	SFP+ plug-in, 10 Gbps, 10 km, TX=1310/RX wide, on two single-mode fibers, LC/PC Blue, Compatible with Juniper
JSPP-ATLP-31-10A	SFP+plug-in, 10 Gbps, 10 km, TX=1310/RX wide, on two single-mode fibers, LC/PC Blue, Industrial Temp -40 to 85°C, Compatible with Juniper

Contact Information



Ascent Communication Technology Ltd

AUSTRALIA

140 William Street, Melbourne
Victoria 3000, AUSTRALIA
Phone: +61-3-8691 2902

CHINA

Unit 1933, 600 Luban Road
200023, Shanghai, CHINA
Phone: +86-21-60232616

EUROPE

Pfarrer-Bensheimer-Strasse 7a
55129 Mainz, GERMANY
Phone: +49 (0) 6136926 3246

Hong Kong SAR

Unit 9, 12th Floor, Wing Tuck Commercial Centre
177 Wing Lok Street, Sheung Wan, Hong Kong SAR
Phone: +852-2851 4722

USA

2710 Thomes Ave
Cheyenne, WY 82001, USA
Phone: +1 203 350 9822

VIETNAM

11th Floor, Hoa Binh Office Tower
106 Hoang Quoc Viet Street, Nghia Do Ward
Cau Giay District, Hanoi 10649, VIETNAM
Phone: +84-24-37955917

WEB: www.ascentcomtec.com

EMAIL: sales@ascentcomtec.com

Specifications and product availability are subject to change without notice.
Copyright © 2025 Ascent Communication Technology Limited. All rights reserved.
Ver. ACT_SFPP-ATLP-31-10_Datasheet_V1j_Jan_2021