


## 100 Gb/s 10 km QSFP28 LR4 Transceiver

### QSFP Series

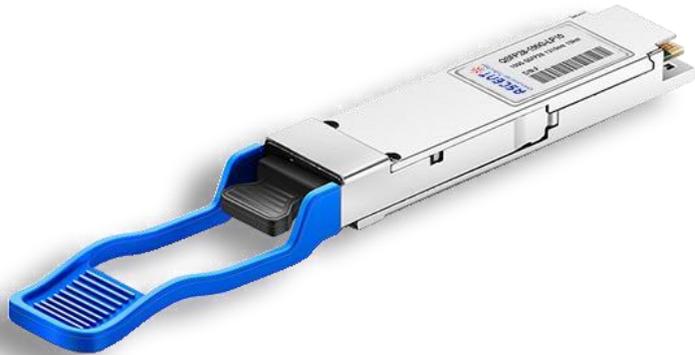

Ascent's 100G QSFP28 LR4 is designed for 10km optical communication applications. This module contains 4-lane optical transmitter, 4-lane optical receiver and module management block including 2 wire serial inter-face. The optical signals are multiplexed to a single-mode fiber through an industry standard LC connector.

Ascent's 100G QSFP28 LR4 Optical Transceiver integrates receiver and transmitter path on one module. In the transmit side, four lanes of serial data streams are recovered, retimed, and passed to four laser drivers. The laser drivers control 4 × Distributed Feedback Laser (DFB) with center wavelengths of 1296 nm, 1300 nm, 1305 nm, and 1309 nm. The optical signals are multiplexed to a single-mode fiber through an industry standard LC connector. In the receive side, the four lanes of optical data streams are optically de-multiplexed by the integrated optical de-multiplexer. Each data stream is recovered by a PIN photo-detector and trans-impedance amplifier, retimed. This module features a hot-pluggable electrical interface, low power consumption and MDIO management interface.

This product is designed with form factor, optical/electrical connections, and digital diagnostic interface according to the QSFP28 Multi-Source Agreement (MSA) and compliant to IEEE 802.3bm.


### Key Features

- Supports 100GE line rate (103.125 Gb/s, CAUI-4)
- Up to 10 km reach
- LAN WDM DML laser and PIN ROSA
- QSFP28 MSA compliant, duplex LC interface
- Integrated DDM via I<sup>2</sup>C
- Low power supply consumption(<4W commercial / <5W industrial)
- Wide operating temperature: 0°C~70°C / -40°C~85°C

## Specifications

Parameter	Symbol	Min.	Typ.	Max.	Unit
Operating Case Temperature	$T_{op}$	0		+70	°C
		-40		+85	°C
Power Supply Voltage	$V_{CC}$	3.13	3.3	3.47	V
Power Supply Current	$I_{CC}$	-		1.21	A
				1.51	A
Maximum Power Consumption	$P_D$			4	W
				5	
Aggregate Bit Rate	$BR_{AVE}$		103.125		Gb/s
Lane Bit Rate	$BR_{LANE}$		25.78125		Gb/s
Signaling Speed per Lane			25.78125		Gbps
Lane Wavelength	$L0$	1294.53	1295.56	1296.59	nm
	$L1$	1299.02	1300.05	1301.09	nm
	$L2$	1303.54	1304.58	1305.63	nm
	$L3$	1308.09	1309.14	1310.19	nm
Total Average Launch Power	$P_T$			10.5	dBm
Average Launch Power per Lane,	$P_{AVG}$	-4.3		4.5	dBm
OMA, each Lane	$P_{OMA}$	-1.3		4.5	dBm
Average Output Power(Laser Turn Off)	$P_{off}$			-30	dBm
Signaling Rate, each Lane			25.78125		Gbps
Center Wavelength Lane 0	$\lambda_0$	1294.53	1295.56	1296.59	nm
Center Wavelength Lane 1	$\lambda_1$	1299.02	1300.05	1301.09	nm
Center Wavelength Lane 2	$\lambda_2$	1303.54	1304.58	1305.63	nm
Center Wavelength Lane 3	$\lambda_3$	1308.09	1309.14	1310.19	nm
Damage Threshold , each Lane	$P_{damage}$	5.5			dBm
Differential Voltage Pk-Pk	$V_{pp}$			900	mV
Differential Output Voltage Wwing	$V_{out, pp}$			900	mV

## Outline Diagram

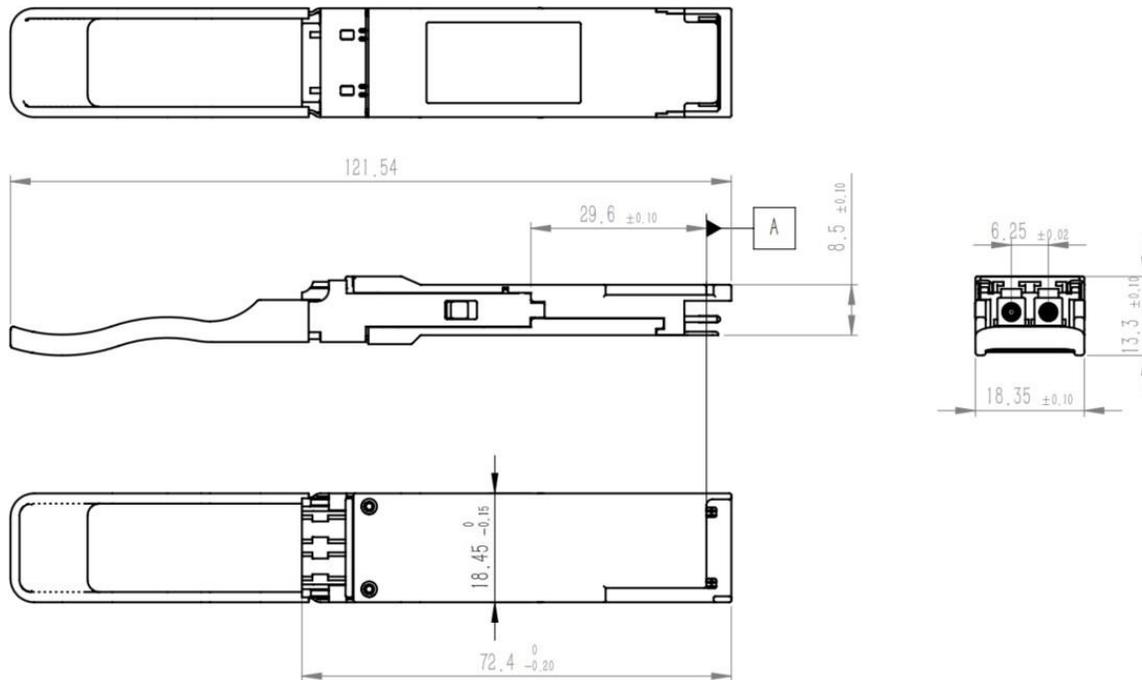

## Ordering Information

Product Name	Product Description
QSFP28-100G-LP10	QSFP28 plug-in, 100GBASE-LR4 1295 nm, 1300 nm, 1304 nm, 1309 nm, 10 km optical transceiver, LC, DOM
QSFP28-100G-L10A	QSFP28 Plug-in, 100GBASE-LR4 1295 nm, 1300 nm, 1304 nm, 1309nm 10 km Optical Transceiver, LC, DOM, -40 °C to +85 °C
JQ28-100G-LP10	QSFP28 plug-in, 100GBASE-LR4 1295 nm, 1300 nm, 1304 nm, 1309 nm, 10 km optical transceiver, LC, DOM, Compatible with Juniper
JQ28-100G-LP10A	QSFP28 Plug-in, 100GBASE-LR4 1295 nm, 1300 nm, 1304 nm, 1309nm 10km Optical Transceiver, LC, DOM, Industrial Temp -40 °C to +85 °C, Compatible with Juniper



**Ascent Communication Technology Ltd**

**AUSTRALIA**

140 William Street, Melbourne  
Victoria 3000, AUSTRALIA  
Phone: +61-3-8691 2902

**Hong Kong SAR**

Room 1210, 12th Floor, Wing Tuck Commercial Centre  
181 Wing Lok Street, Sheung Wan , Hong Kong SAR  
Phone: +852-2851 4722

**CHINA**

Unit 1933, 600 Luban Road  
200023, Shanghai, CHINA  
Phone: +86-21-60232616

**USA**

2710 Thomes Ave  
Cheyenne, WY 82001, USA  
Phone: +1 203 350 9822

**EUROPE**

Pfarrer-Bensheimer-Strasse 7a  
55129 Mainz, GERMANY  
Phone: +49 (0) 6136 926 3246

**VIETNAM**

11th Floor, Hoa Binh Office Tower  
106 Hoang Quoc Viet Street, Nghia Do Ward  
Cau Giay District, Hanoi 10649, VIETNAM  
Phone: +84-24-37955917

**WEB:** [www.ascentcomtec.com](http://www.ascentcomtec.com)

**EMAIL:** [sales@ascentcomtec.com](mailto:sales@ascentcomtec.com)

Specifications and product availability are subject to change without notice.  
Copyright © 2026 Ascent Communication Technology Limited. All rights reserved.  
Ver. ACT\_QSFP28-100G-LP10\_Overview\_V1f\_May\_2019