


QSFP28 BIDI 100 Gb/s ER Transceiver 40km

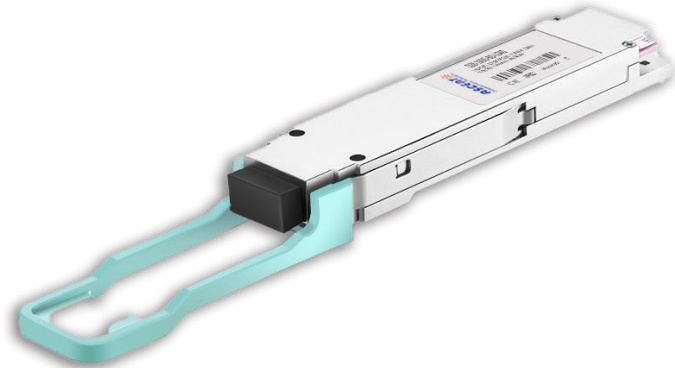

QSFP Series

- **100GBASE-ER BIDI**
- **Lane signaling rate
106.25Gb/s with PAM4**
- **Up to 40km transmission
on SMF**
- **QSFP28 MSA package with
simplex LC connector**
- **Single +3.3V power supply**
- **Maximum power
consumption 4.5W**
- **Compliant to 802.3cu, SFF-
8636&SFF-8679 standard**
- **Complies with EU Directive
2015/863/EU**

The Q28-100G-BD-LU40/LD40 BiDi QSFP28 Transceiver Module is a high-performance optical transceiver designed for bidirectional data transmission over single-mode fiber. It transmits at two key wavelengths, 1304.58nm and 1309.14nm, achieving 100Gbps speeds over distances up to 40 kilometers. Equipped with an LC simplex connector and compliant with QSFP28 MSA standards, this module is used in data centers and telecommunications for efficient, long-distance data transfer. Its QSFP28 form factor ensures compatibility with various network equipment, and it's hot-pluggable for easy installation and maintenance.


Unlike traditional transceivers, which require two fibers, the BiDi QSFP28 consolidates data transfer into one strand, making it ideal for large data centers with extensive cabling needs.

The module is also durable and reliable, with digital diagnostics monitoring (DDM) for real-time tracking of temperature, power, and performance metrics. Rigorously tested to meet industry standards, the Q28-100G-BD-LU40/LD40 BiDi QSFP28 offers a cost-effective, high-speed solution for expanding data infrastructure, providing scalability and efficient connectivity.


Key Features

- Supports 100GBASE-ER BIDI
- Lane signaling rate 106.25Gb/s with PAM4
- Up to 40km transmission on SMF
- EML laser and APD receiver
- 4x25.78Gb/s with NRZ electrical interface (CAUI-4)
- High speed I/O electrical interface
- I2C interface with integrated Digital Diagnostic monitoring
- QSFP28 MSA package with simplex LC connector
- Single +3.3V power supply
- Maximum power consumption 4.5 W
- Operating case temperature: 0 to +70 °C
- Compliant to 802.3cu, SFF-8636&SFF-8679 standard
- Complies with EU Directive 2015/863/EU

Mechanical Dimension

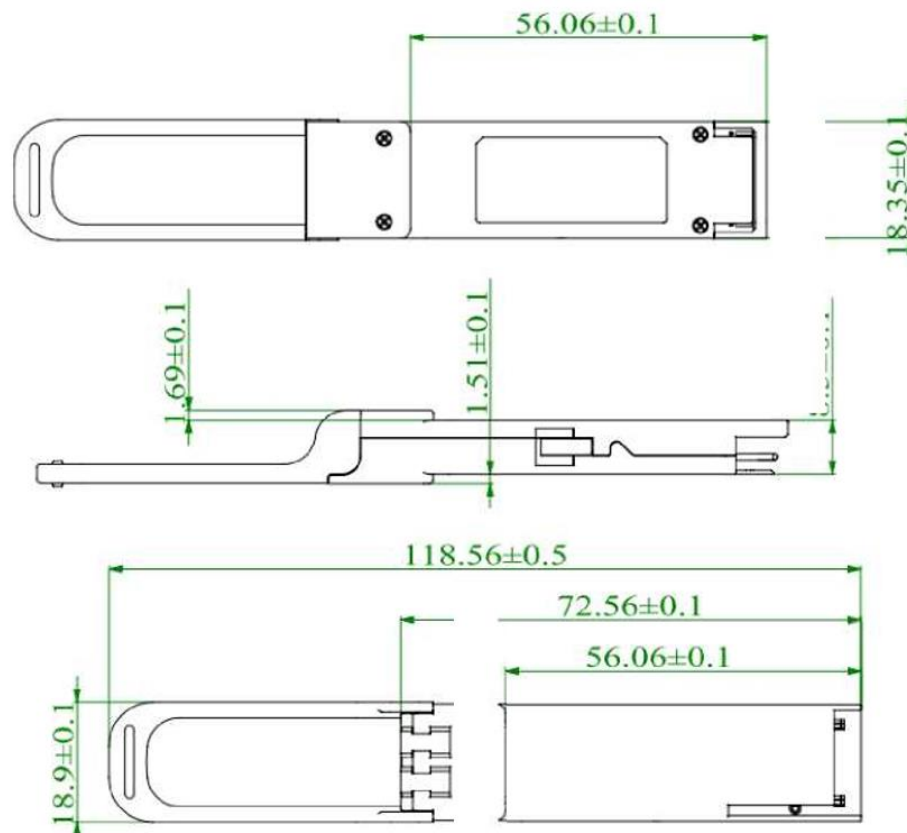

Pin Assignment

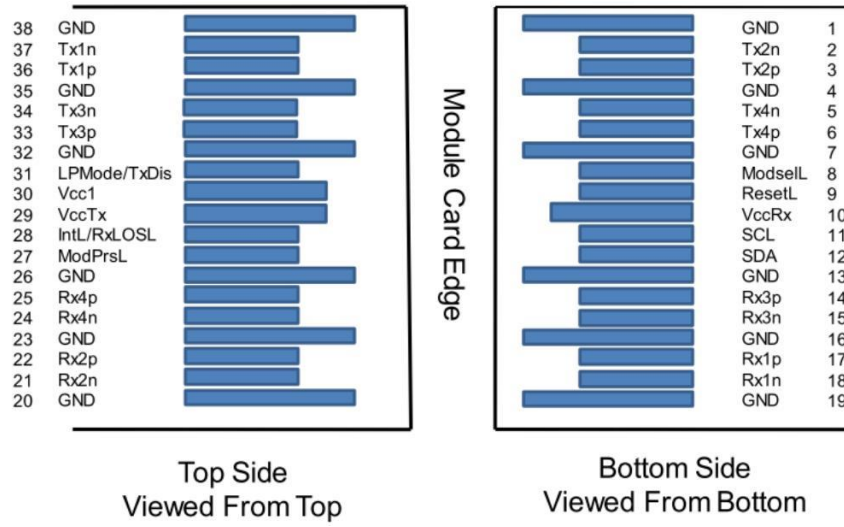

Pin	Logic	Symbol	Description	Plug Seq.	Note
1		GND	Ground	1	1
2	CML-I	Tx2n	Transmitter Inverted Data Input	3	
3	CML-I	Tx2p	Transmitter Non-Inverted Data output	3	
4		GND	Ground	1	1
5		NC		3	
6		NC		3	
7		GND	Ground	1	1
8	LVTLL-I	ModSelL	Module Select	3	
9	LVTLL-I	ResetL	Module Reset	3	
10		VccRx	+ 3.3V Power Supply Receiver	2	2
11	LVC MOS-I/O	SCL	2-Wire Serial Interface Clock	3	
12	LVC MOS-I/O	SDA	2-Wire Serial Interface Data	3	
13		GND	Ground	1	1
14		NC		3	
15		NC		3	
16		GND	Ground	1	1
17	CML-O	Rx1p	Receiver Non-Inverted Data Output	3	
18	CML-O	Rx1n	Receiver Inverted Data Output	3	
19		GND	Ground	1	1
20		GND	Ground	1	1
21	CML-O	Rx2n	Receiver Inverted Data Output	3	
22	CML-O	Rx2p	Receiver Non-Inverted Data Output	3	
23		GND	Ground	1	1
24		NC		3	
25		NC		3	
26		GND	Ground	1	1
27	LVTTL-O	ModPrsL	Module Present	3	
28	LVTTL-O	IntL	Interrupt	3	
29		VccTx	+3.3 V Power Supply transmitter	2	2
30		Vcc1	+3.3 V Power Supply	2	2

Pin	Logic	Symbol	Description	Plug Seq.	Note
31	LVTTL-I	LPMode/TxDIS	Low Power Mode	3	
32		GND	Ground	1	1
33		NC		3	
34		NC		3	
35		GND	Ground	1	1
36	CML-I	Tx1p	Transmitter Non-Inverted Data Input	3	
37	CML-I	Tx1n	Transmitter Inverted Data Output	3	
38		GND	Ground	1	1

Notes:

1. GND is the symbol for signal and supply (power) common for the QSFP28 module. All are common within the QSFP28 mod and all module voltages are referenced to this potential unless otherwise noted. Connect these directly to the host board signal-common ground plane.
2. Vcc Rx, Vcc1 and Vcc Tx are the receiver and transmitter power supplies and shall be applied concurrently. Requirements defined for the host side of the Host Edge Card Connector are listed in MSA. The connector pins are each rated for a maximum current of 1000 mA.

Specifications

Absolute Maximum Ratings

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Storage Temperature	Ts	-40	-	+85	°C	
Supply Voltage	Vcc	-0.5	-	+4.0	V	
Operating Relative Humidity	RH	-	-	+85	%	

Recommended Operating Conditions

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Operating Case Temperature	Tc	0	-	+70	°C	
Power Supply Voltage	Vcc	3.13	3.3	3.47	V	
Power Supply Current	Icc	-	-	1.3	A	
Maximum Power Consumption	P _D	-	-	4.5	W	
Data Rate(Optical)	DRo	-	106.25	-	Gb/s	
Transmission Distance	TD	-	-	40	km	Over SMF

Optical and Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Transmitter						
Center Wavelength	CW	1304.06	1304.58	1305.1	nm	
		1308.61	1309.14	1309.66	nm	
Average Launch Power	P _{TX}	1.7	-	7.1	dBm	1
Outer Optical Modulation Amplitude	OMA	4.5	-	7.9	dBm	TDECQ<1.4
		3.3+TDECQ	-			TDECQ>1.4
Transmitter and Dispersion Eye Closure for PAM4 (TDECQ) (max)	TDECQ	-	-	3.9	dBm	
		-	-	2.7	dB	
Average Output Power (Laser Turn off)	P _{OUT-OFF}	-	-	-15	dBm	
Side Mode Suppression Ratio	SMSR	30	-	-	dB	
Extinction Ratio	ER	6	-	-	dB	
Transmitter Reflectance	Tref	-	-	-26	dB	
Optical Return Loss Tolerance	ORLT	-	-	15	dB	
Receiver						
Center Wavelength	CW	1308.61	1309.14	1309.66	nm	
		1304.06	1304.58	1305.1	nm	
Damage Threshold	P _{damage}	-2.4	-	-	dBm	2
Average Rx Power	P _{RX}	-16.0	-	-3.4	dBm	3
Receive Power_OMAAouter	P _{OMA}	-	-	-2.6	dBm	
Receiver Sensitivity_OMAAouter	SEN _{OMA}	-	-	-13.8	dBm	4
Stressed Receiver Sensitivity_OMAAouter	SRS	-	-	-11.3	dBm	5
Los Assert	LosA	-26	-	-	dBm	
Los De-Assert	LosDA	-	-	-17	dBm	
Los Hysteresis	LosH	0.5	-	-	dB	

Notes:

1. The optical power is launched into SMF.
2. The receiver shall be able to tolerate, without damage, continuous exposure to an optical input signal having this average power level. The receiver does not have to operate correctly at this input power.
3. Average receive power, each lane (min) is informative and not the principal indicator of signal strength.
4. Measured with conformance test signal at TP3 using the test pattern PRBS31Q or scrambled idle for stressed receiver sensitivity for the BER= 2.4x10⁻⁴.
5. Measured with conformance test signal at TP3 (see3.11) for the BER specified in IEEE Std 802.3cd clause 140.1.1.

Electrical Characteristics

High-Speed Signal: Compliant to CAUI-4 (IEEE 802.3cu)

Low-Speed Signal: Compliant to SFF-8679.

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Transmitter(Module Input)						
Input Differential Impedance	R _{in}	-	100	-	Ohm	
Differential Data Input Amplitude	V _{IN,P-P}	80	-	900	mVpp	
Differential Termination Mismatch (max)	D-mis match	-	-	10	%	
DC Common-Mode Input Voltage		-0.3	-	2.8	V	
Transition Time (20% to 80%)	Tr Tf	10	-	-	ps	
LPMODE, Reset and ModSelL / Tx dis	V _{IL}	-0.3	-	0.8	V	
LPMODE, Reset and ModSelL / Tx dis	V _{IH}	2.0	-	V _{CC} +0.3	v	
Receiver (Module Output)						
Output Differential Impedance	R _{out}	-	100	-	Ohm	
Differential Data Output Amplitude	V _{OUT,P-P}	-	-	900	mVpp	
Differential Termination Mismatch (max)	D-mis match	-	-	10	%	
Transition Time, 20% to 80%	Tr Tf	12	-	-	ps	
ModPrsL and IntL/ Rx los	V _{OL}	0	-	0.4	V	
ModPrsL and IntL/ Rx los	V _{OH}	V _{CC} -0.5	-	V _{CC} +0.3	v	

Digital Diagnostics

Parameter	Range	Accuracy	Unit	Calibration
Temperature	0 to 70	±3	°C	Internal
Voltage	0 to V _{CC}	0.1	V	Internal
Tx Bias Current	0 to 100	±10%	mA	Internal
Tx Output Power	1.7 to 7.1	±3	dB	Internal
Rx Input Power	-16.0 to -3.4	±3	dB	Internal

Ordering Information

Product Name	Product Description
Q28-100G-BD-LU40	QSFP28 Plug-in, 100GBASE-ER, 40km, BiDi, TX1304; RX1309, SMF, Simplex LC, Blue Latch, DOM
Q28-100G-BD-LD40	QSFP28 Plug-in, 100GBASE-ER, 40km, BiDi, TX1309; RX1304, SMF, Simplex LC, Green Latch, DOM

Contact Information



Ascent Communication Technology Ltd

AUSTRALIA

140 William Street, Melbourne
Victoria 3000, AUSTRALIA
Phone: +61-3-8691 2902

Hong Kong SAR

Room 1210, 12th Floor, Wing Tuck Commercial Centre
181 Wing Lok Street, Sheung Wan , Hong Kong SAR
Phone: +852-2851 4722

CHINA

Unit 1933, 600 Luban Road
200023, Shanghai, CHINA
Phone: +86-21-60232616

USA

2710 Thomes Ave
Cheyenne, WY 82001, USA
Phone: +1 203 350 9822

EUROPE

Pfarrer-Bensheimer-Strasse 7a
55129 Mainz, GERMANY
Phone: +49 (0) 6136 926 3246

VIETNAM

11th Floor, Hoa Binh Office Tower
106 Hoang Quoc Viet Street, Nghia Do Ward
Cau Giay District, Hanoi 10649, VIETNAM
Phone: +84-24-37955917

WEB: www.ascentcomtec.com

EMAIL: sales@ascentcomtec.com

Specifications and product availability are subject to change without notice.
Copyright © 2026 Ascent Communication Technology Limited. All rights reserved.
Ver. ACT_Q28-100G-BD-LU40-LD40_Datasheet_V1c_Nov_2023