

High Performance Optical Amplifier

AT5000 EDFA Series

- **Video-Overlay
for FTTx Applications**
- **Up to 32 Output Ports**
- **Low noise, High
Performance**
- **Intuitive Front Panel
LCD Display**
- **Adjustable Output**
- **Universal Management
with Craft Interface**
- **SNMP Management**



AT5000 1RU or 2RU Erbium-Doped Fiber Amplifier (EDFA) offers a flexible and scalable optical amplification for high quality video transmission in CATV networks. Together with ACT 1RU 1550nm transmitter, the AT5000 EDFA provides an ideal video overlay solution in high density FTTX networks to bring the video services to business and home premises.


AT5000 EDFA series simplifies the application by offering low noise, high output power, and intuitive front panel LCD display to make operator's life easier. The optical amplifier is packaged in a self-contained 19" sub-rack of 1 or 2 RU with universal mains power supply and SNMP management.

The optical output power level can be ordered from 13 dBm to 26dBm with variable output features from 20dBm up. Multiport EDFAs accommodates up to 16 output ports in 1RU setting and 32 output ports in 2RU setting. Combined with our AT5000 1550nm direct or externally modulated laser transmitter, MSOs can quickly deploy and activate advanced multi-media services in long distance video transmission and high subscriber count FTTH networks.

Key Features

- Low noise, high performance
- Suitable for analog and digital CATV systems, DOCSIS, FTTH and more applications
- Suitable for 1550 nm DWDM applications for multiple wavelengths on single fibre
- Nominal output powers from 13 dBm to 22 dBm per port
- Adjustable output power
- Extend analog and digital CATV to suit long distance feeders or larger FTTH distribution systems
- Local or remote monitoring and configuration
- SNMP/HTTP monitoring, management and control

Application Diagram

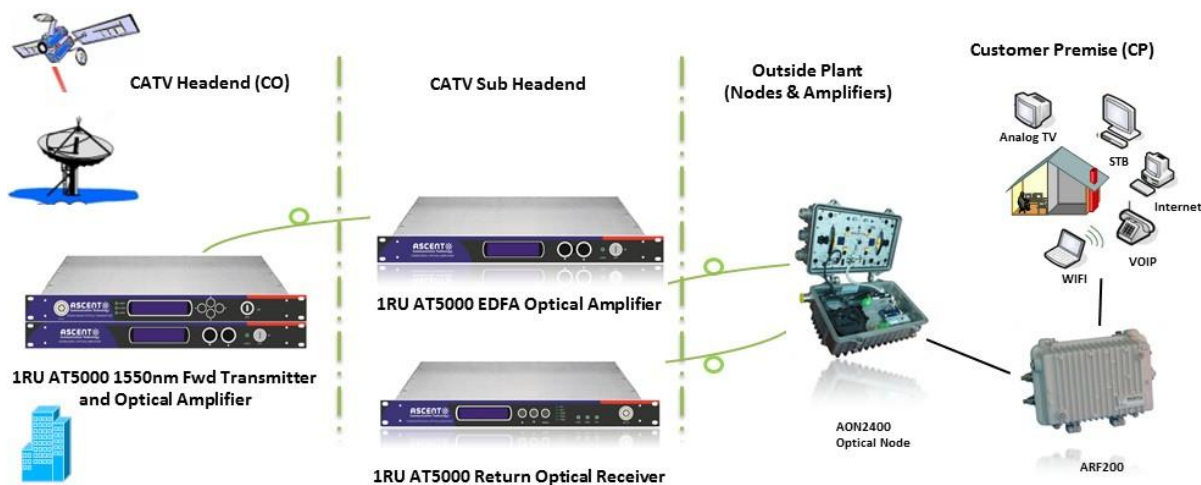

Specifications

AT5000 EDFA Erbium-Doped Fiber Amplifier - 19" 1RU

Item	Description
Operating Wavelength	1540 nm to 1563 nm
Input Power	-8 dBm to +10 dBm, +3 dBm typical
Maximum Output Power	22 dBm per port (adjustable -3 dB)
Maximum Output Ports	16 (SC/APC), 32 (LC/APC)
Output Power Stability	±0.3 dB
Noise Figure (PIN = 0 dBm)	<5 dB (o/p < 27 dBm) <6 dB (o/p < 40 dBm)
Polarization Dependence Loss	0.3 dB
Polarization Dependence Gain	0.4 dB
Polarization Mode Dispersion	0.5 ps
Input / Output Isolation	30 dB
Return Loss	45 dB
SNMP	RJ45
Serial Interface	RS232
Power Supply	AC: 90 V to 265 V DC: -48 V
Power Consumption	50 W max. (o/p < 27 dBm) 80 W max. (o/p < 40 dBm)
Operating Temperature	-5 °C to +65 °C
Storage Temperature	-40 °C to +80 °C
Operating Humidity	-5 % to 95 % RH (non-condensing)
Dimensions (W x D x H)	Standard version: 483 mm × 368 mm × 44 mm Short version: 483 mm × 256 mm × 44 mm (available for selected configurations)
Weight	≤6 kg

Ordering Information

AT 5000 Series 1RU Optical EDFA Ordering Information																																																
AT-	5X-	EDFA-	XX-	XX-	XX-	XX	X-	X																																								
<table><tr><th></th><th>Gain Type</th></tr><tr><td>50</td><td>Standard</td></tr><tr><td>51</td><td>Gain Flattened</td></tr><tr><td>53</td><td>Raman</td></tr></table>			Gain Type	50	Standard	51	Gain Flattened	53	Raman	<table><tr><th></th><th>Output Power</th></tr><tr><td>13</td><td>13dBm</td></tr><tr><td>16</td><td>16dBm</td></tr><tr><td>17</td><td>17dBm</td></tr><tr><td>18</td><td>18dBm</td></tr><tr><td>19</td><td>19dBm</td></tr><tr><td>20</td><td>20dBm</td></tr><tr><td>21</td><td>21dBm</td></tr><tr><td>22</td><td>22dBm</td></tr><tr><td>23</td><td>23dBm</td></tr></table>			Output Power	13	13dBm	16	16dBm	17	17dBm	18	18dBm	19	19dBm	20	20dBm	21	21dBm	22	22dBm	23	23dBm	<table><tr><th></th><th>Optical Connector</th></tr><tr><td>SC</td><td>SC/APC</td></tr><tr><td>LC</td><td>LC/APC</td></tr></table>			Optical Connector	SC	SC/APC	LC	LC/APC	<table><tr><th></th><th>Power Supply</th></tr><tr><td>-</td><td>Default Single PS</td></tr><tr><td>2</td><td>Dual PS for multiple output version</td></tr></table>			Power Supply	-	Default Single PS	2	Dual PS for multiple output version	
	Gain Type																																															
50	Standard																																															
51	Gain Flattened																																															
53	Raman																																															
	Output Power																																															
13	13dBm																																															
16	16dBm																																															
17	17dBm																																															
18	18dBm																																															
19	19dBm																																															
20	20dBm																																															
21	21dBm																																															
22	22dBm																																															
23	23dBm																																															
	Optical Connector																																															
SC	SC/APC																																															
LC	LC/APC																																															
	Power Supply																																															
-	Default Single PS																																															
2	Dual PS for multiple output version																																															
		<table><tr><th></th><th>Output Ports</th></tr><tr><td>01</td><td>1 Optical Output</td></tr><tr><td>02</td><td>2 Optical Outputs</td></tr><tr><td>04</td><td>4 Optical Outputs</td></tr><tr><td>08</td><td>8 Optical Outputs</td></tr><tr><td>16</td><td>16 Optical Outputs</td></tr><tr><td>32</td><td>32 Optical Outputs</td></tr></table>			Output Ports	01	1 Optical Output	02	2 Optical Outputs	04	4 Optical Outputs	08	8 Optical Outputs	16	16 Optical Outputs	32	32 Optical Outputs	<table><tr><th></th><th>Power Supply</th></tr><tr><td>AC</td><td>90 to 265 VAC Australia Plug</td></tr><tr><td>DC</td><td>30 to 72 VDC</td></tr><tr><td>A3</td><td>90 to 265 VAC with Continental EU Plug</td></tr><tr><td>A4</td><td>90 to 265 VAC with North America Plug</td></tr></table>			Power Supply	AC	90 to 265 VAC Australia Plug	DC	30 to 72 VDC	A3	90 to 265 VAC with Continental EU Plug	A4	90 to 265 VAC with North America Plug	<table><tr><th></th><th>Optical Switch or Receiver</th></tr><tr><td>-</td><td>No Optical Switch or RX</td></tr><tr><td>S</td><td>Built-in Optical Switch</td></tr><tr><td>R</td><td>Built-in Optical RX</td></tr><tr><td>O</td><td>Built-in Optical Switch & RX</td></tr></table>		Optical Switch or Receiver	-	No Optical Switch or RX	S	Built-in Optical Switch	R	Built-in Optical RX	O	Built-in Optical Switch & RX								
	Output Ports																																															
01	1 Optical Output																																															
02	2 Optical Outputs																																															
04	4 Optical Outputs																																															
08	8 Optical Outputs																																															
16	16 Optical Outputs																																															
32	32 Optical Outputs																																															
	Power Supply																																															
AC	90 to 265 VAC Australia Plug																																															
DC	30 to 72 VDC																																															
A3	90 to 265 VAC with Continental EU Plug																																															
A4	90 to 265 VAC with North America Plug																																															
	Optical Switch or Receiver																																															
-	No Optical Switch or RX																																															
S	Built-in Optical Switch																																															
R	Built-in Optical RX																																															
O	Built-in Optical Switch & RX																																															