

MTP/MPO Breakout Cable

MTP/MPO Series



- **US Conec MTP® connector, Senko MPO Plus premium connector**
- **Corning Clearcurve® multimode fiber, SMF-28® Ultra optical fiber**
- **OS2, OM3, OM4 available**
- **0.35 dB elite low loss connector or 0.5 dB standard loss connector**
- **Allows easy migration from 10GbE to 40GbE or 100GbE**
Easy installation

Ascent MTP/MPO breakout multi-fiber cable assemblies facilitate rapid deployment of high density backbone cabling in data centers and other high fiber environments, reducing network installation or reconfiguration time and cost.

These MTP/MPO breakout multi-fiber cable are used to interconnect cassettes, panels or ruggedized MTP/MPO fan-outs, spanning MDA, HDA and EDA zones. Typically these cables consist of OM3/OM4 multimode cables terminated with MTP/MPO connectors on both ends. The MTP/MPO connectors can be male (with guide pin on the contact interface) or female (without guide pin on the contact interface).

MTP/MPO breakout cables are typically available in 8, 12, 24, 48, or 72 fibers. These fibers are connected between two connectors in three different methods that are called method A, method B, and method C. While in method A fibers are straight through, in method B fibers are reversed connected. In method C, the fibers are pairs flipped. They use a simple push/pull latching mechanism for easy insertion and removal. This allows shorter installation time and lowers overall cost.


Key Features

- US Conec MTP® connector, Senko MPO Plus premium connector
- Corning Clearcurve® multimode fiber, SMF-28® Ultra optical fiber
- OS2, OM3, OM4 available
- 0.35 dB elite low loss connector, 0.5 dB standard loss connector
- Factory terminated and tested
- Allows easy migration from 10GbE to 40GbE or 100GbE
- Pulling eyes are provided as an option to protect the fiber ends during installation

Standards Compliance

- RoHS, CE (EN50575 CPR) and ISO9001 compliant
- EIA/TIA, Telcordia GR-326-CORE standards
- IEC61754-7
- TIA 605-4 (FOCIS 5)
- YD/T1272.5

Technical Drawing

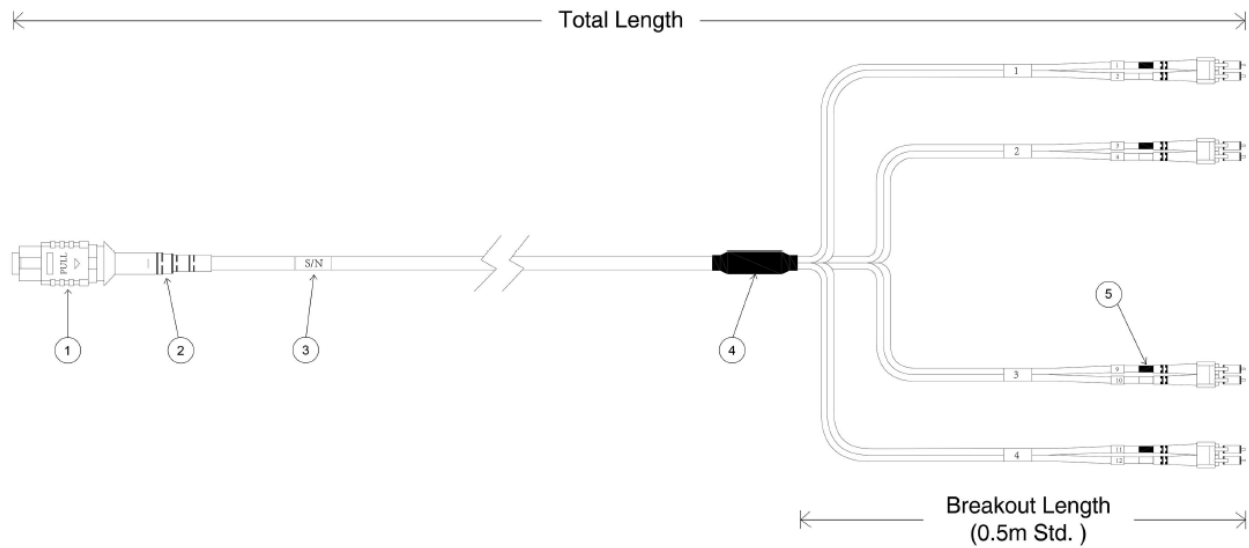



1. MTP/MPO Connector

2. Connector Boot

3. Serial Number Label

4. Fan Out Kit

5. LC Connector

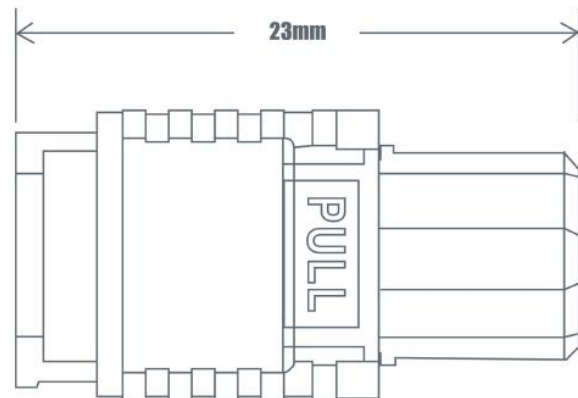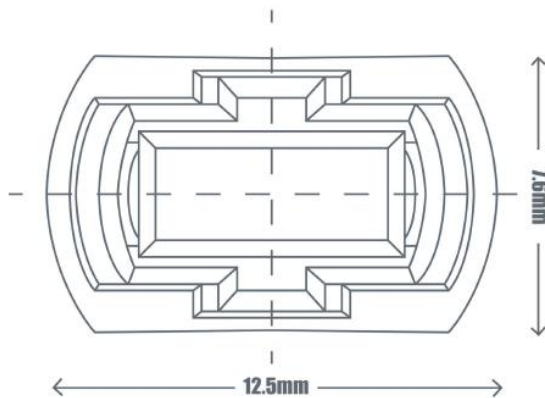

Specifications

Construction

Fiber Count	8-144 Fibers
Fiber Mode	Single-mode: OS2 9/125 μ m Multi-mode: OM4 50/125 μ m, OM3 50/125 μ m
Fiber Brand	Corning ClearCurve® multimode fiber and SMF-28® Ultra optical fiber
Connector A	MTP Female, Male; MPO Female, Male
Connector Brand	US Conec MTP®, Senko MPO
Connector B	LC, SC, FC, ST
Polarity	Type A, Type B, Type C
Cable Jacket Ratings	Plenum (OFNP) Low Smoke Zero Halogen (LSZH) Riser (PVC)

Color Codes	MTP	MPO	LC
Cable Jackets	OS2: Yellow OM4: Magenta OM3: Aqua	OS2: Yellow OM4: Magenta OM3: Aqua	OS2: Yellow OM4: Magenta OM3: Aqua
Connectors	OS2: Green OM4/OM3: Aqua	OS2: Green OM4/OM3: Aqua	Single-Mode UPC Blue, APC Green Multi-Mode: Beige
Boots	8 Fibers: Grey 12 Fibers: Black 24 Fibers: Red	8/12/24 Fibers: Black	Single-Mode UPC Blue, APC Green Multi-Mode: Beige

Physical Properties

Cable Diameter*	3.0 mm
Breakout Leg	2.0/0.9 mm
Breakout Length	0.5/0.3 m
Minimum Bend Radius	Single-mode: 10.0 mm Multi-mode: 7.5 mm
Operating Temperature	-10 °C to +70 °C
Storage Temperature	-40 °C to +85 °C

* Please note that the cable diameter of standard single MTP/MPO cable is 3.0 mm, and for cables with different bundles, the diameter is different, as shown below:

Bundle Count	MTP/MPO-12	MTP/MPO-24	Trunk Diameter
2 Bundles*	24 Fibers	48 Fibers	6.0 mm
3 Bundles	36 Fibers	72 Fibers	8.0 mm
4 Bundles	48 Fibers	96 Fibers	8.0 mm
6 Bundles	72 Fibers	144 Fibers	8.0 mm
8 Bundles	96 Fibers	/	10.0 mm
12 Bundles	144 Fibers	/	10.0 mm

* “Bundle” means a combination of several fibers. For example, for MTP/MPO-12 cables, 2 bundles means 24 fibers (2x12); for MTP/MPO-24 cables, 2 bundles means 48 fibers (2x24).

Construction	Description
Wavelength	Single-mode: 1310/1550 nm Multi-mode: 850/1300 nm
Transmission Distance	OM4: 150 m at 40/100G, 400 m at 10G OM3: 100 m at 40/100G, 300 m at 10G
Connector	MTP/MPO
Attenuation	Single-mode 1310 nm: ≤0.32 dB/km Single-mode 1550 nm: ≤0.18 dB/km Multi-mode 850 nm: ≤2.3 dB/km Multi-mode 1300 nm: ≤0.6 dB/km
Insertion Loss	Single-mode: ≤0.35 dB Multi-mode: ≤0.35 dB
Return Loss	Single-mode APC: ≥60 dB Single-mode UPC: ≥50 dB Multi-mode UPC: ≥20 dB
Connector	LC/SC/FC/ST
Insertion Loss	Single-mode APC: ≤0.3 dB Single-mode UPC: ≤0.2 dB Multi-mode UPC: ≤0.2 dB
Return Loss	Single-mode APC: ≥65 dB Single-mode UPC: ≥50 dB Multi-mode: ≥30 dB

Ordering Information

Product Name	Product Description
MPO-LC-OM4-12LSZH-A-xx-B05	MTP Female to LC UPC Duplex 12 Fibers Type A Straight Through LSZH OM4 50/125 Multimode Elite HD BIF Breakout Cable, xx m, Breakout Length: 0.5m
MPO-LC-OM4-12LSZH-B-xx-B05	MTP Female to LC UPC Duplex 12 Fibers Type B Cross LSZH OM4 50/125 Multimode Elite HD BIF Breakout Cable, xx m, Breakout Length: 0.5m
MPO-LC-OS2-12LSZH-B-xx-B05	MPO Female to LC UPC Duplex 12 Fibers Type B Cross LSZH OS2 9/125 Single Mode Elite Breakout Cable, xx m, Breakout Length: 0.5m
MPO-LC-OS2-24LSZH-A-xx-B05	MPO Female to LC UPC Duplex, 24 Core, Type A, LSZH OS2 9/125 Single Mode Elite Breakout Cable, xx m, Breakout Length: 0.5m

Contact Information



Ascent Communication Technology Ltd

AUSTRALIA

140 William Street, Melbourne
Victoria 3000, AUSTRALIA
Phone: +61-3-8691 2902

CHINA

Unit 1933, 600 Luban Road
200023, Shanghai CHINA
Phone: +86-21-60232616

EUROPE

Pfarrer-Bensheimer-Strasse 7a
55129 Mainz, GERMANY
Phone: +49 (0) 6136 926 3246

HONG KONG SAR

Unit 9, 12th Floor, Wing Tuck Commercial Centre
177 Wing Lok Street, Sheung Wan, HONG KONG
Phone: +852-2851 4722

USA

2710 Thomes Ave
Cheyenne, WY 82001, USA
Phone: +1-203 816 5188

VIETNAM

15 /F TTC Building, Duy Tan Street
Cau Giay Dist., Hanoi, VIETNAM
Phone: +84 243 795 5917

WEB: www.ascentcomtec.com

EMAIL: sales@ascentcomtec.com

Specifications and product availability are subject to change without notice.
Copyright © 2019 Ascent Communication Technology Limited. All rights reserved.
Ver. ACT_MPO_Breakout_Cable_Datasheet_V1e_May_2019